




Z1185-84
FUR/HAIR INTERCEPTOR

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

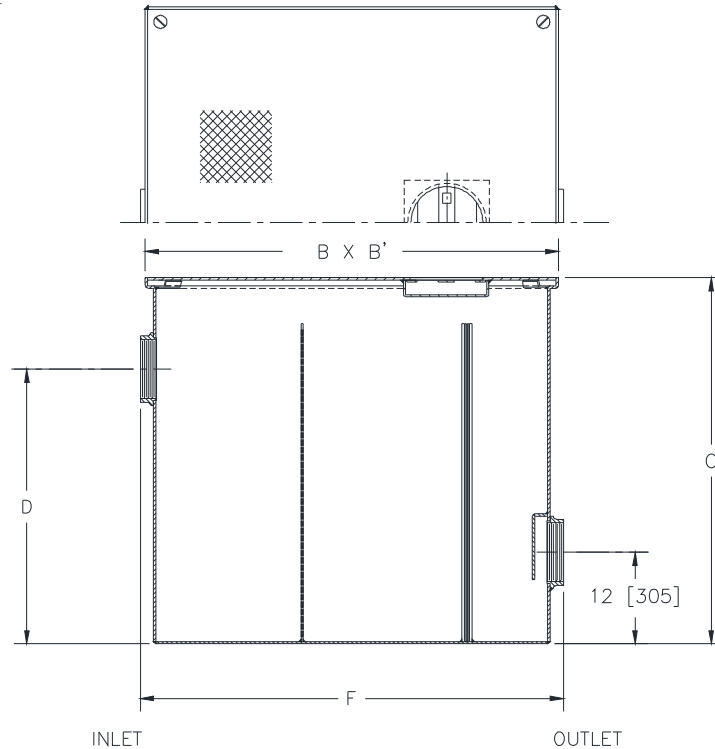

Inlet/Outlet Size	Flow Rate GPM [LPM]	Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]					
			B	B'	C	D	F	
3 [76]	10 [38]	170 [77]	19 [483]	24 [610]	32 [813]	24 [610]	20 [508]	
	20 [76]	182 [83]	29 [737]				30 [762]	
4 [102]	25 [95]	190 [86]	35 [889]	26 [660]			40 [1016]	36 [914]
	50 [189]	310 [141]	39 [991]					40 [1016]
	100 [379]	380 [172]	40 [1016]		40 [1016]	41 [1041]		
6 [152]	300 [1136]	654 [297]	45 [1143]	45 [1143]	40 [1016]	36 [914]	46 [1168]	
	400 [1514]	723 [328]	48 [1219]	48 [1219]	43 [1092]	39 [991]	49 [1245]	
	500 [1893]	911 [414]	52 [1321]	52 [1321]	47 [1194]	43 [1092]	53 [1346]	

ENGINEERING SPECIFICATION: ZURN Z1185-84

Acid Resistant Coated interior and exterior fabricated steel fur/hair interceptor, non-skid secured cover, with stainless fur/hair intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ -RS Stainless Steel Screen Replacement Assembly

* Regularly furnished unless otherwise specified.