



Z100-DP


15" [381] DIAMETER MAIN ROOF DRAIN W/ TOP-SET® ROOF DECK PLATE

SPECIFICATION SHEET

TAG _____



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

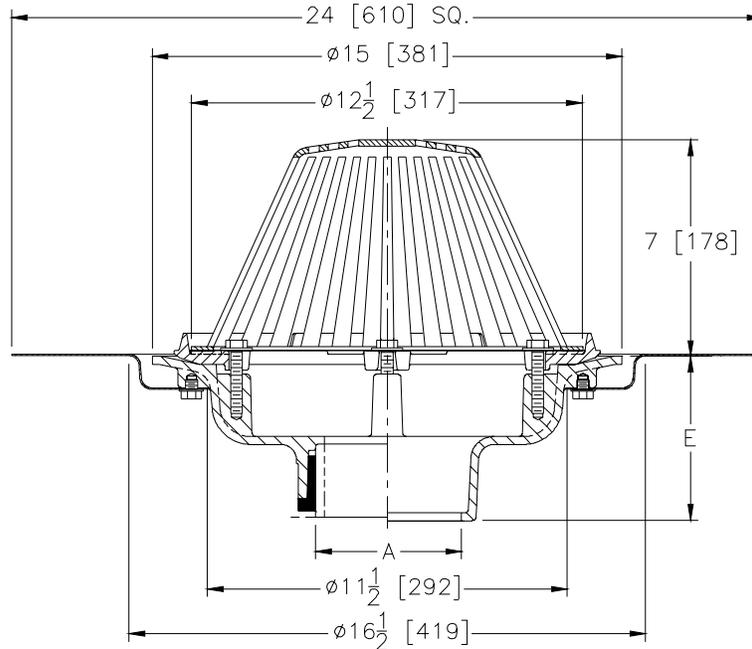

A Pipe Size Inches / [mm]	Approx. Wt. Lbs. / [kg]	Dome Open Area Sq. In. / [sq cm]
2-3-4 [51-76-102]	26 [12]	148 [955]
5-6 [127-152]	27 [12]	
8 [203]	28 [13]	

ENGINEERING SPECIFICATION: ZURN Z100-DP
15 [381] diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard, top-set® roof deck plate and Poly-Dome.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2 thru 6 - 8 [51 thru 152 - 203]
- 2 thru 6 - 8 [51 thru 152 - 203]
- 2 thru 6 - 8 [51 thru 152 - 203]
- 2 - 3 - 4 [51 - 76 - 102]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

E BODY HT. DIM.

- 5 1/4 [133]
- 3 3/4 [95]
- 5 1/4 [133]
- 4 5/8 [117]

PREFIXES

- _____ Z D.C.C.I. Body with Poly-Dome*
- _____ ZA D.C.C.I. Body with Aluminum Dome
- _____ ZC D.C.C.I. Body with Cast Iron Dome
- _____ ZRB D.C.C.I. Body with Plain Bronze Dome

SUFFIXES

- | | |
|---|---|
| <ul style="list-style-type: none"> _____ -A Waterproof Flange _____ -AC Angular Underdeck Clamp _____ -AR Acid Resistant Epoxy Coated Finish _____ -AW 3/4 [19] to 4 [102] Adj. Water Level Regulator _____ -BS Bronze Mesh Screen Over Dome _____ -DR Adjustable Drain Riser Extension Assembly
3-5/8" [92] to 7-1/4" [184] _____ -DX Dex-O-Tex Flange _____ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.) _____ -EA Adjustable Extension Assembly
1 3/4 [44] thru 3 1/2 [89] _____ -EB Elevating Body Plate _____ -ES Static Extension with Secondary Clamp Collar Body _____ -FG Flush Grate (Replaces Dome Strainer) _____ -G Galvanized Cast Iron | <ul style="list-style-type: none"> _____ -GD Galvanized Cast Iron Dome (ZC Only) _____ -SC Secondary Clamp Collar _____ -SE 3 3/4 [95] Slotted Extension - Inverted Roof _____ -SSM Stainless Steel Mesh Screen Over Dome _____ -TC Neo-Loc Test Cap Gasket
(2 [51] to 4 [102] NL Bottom Outlet Only) _____ -VP Vandal-Proof Secured Top _____ -W Internal Water Dam
(Specify 2 [51], 3 [76], 4 [102]) _____ -XJ Vertical Expansion Joint (See Z-190) _____ -84 Stainless Steel Perforated Gravel Guard _____ -85 Stainless Steel Perforated Extension _____ -89 2 [51] High External Water Dam _____ -90 90° Threaded Side Outlet Body |
|---|---|

REV.	DATE: 6/14/04	C.N. NO. 89818
DWG. NO. 63880		PRODUCT NO. Z100-DP

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED