




Z-1189-81

OIL/SEDIMENT INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

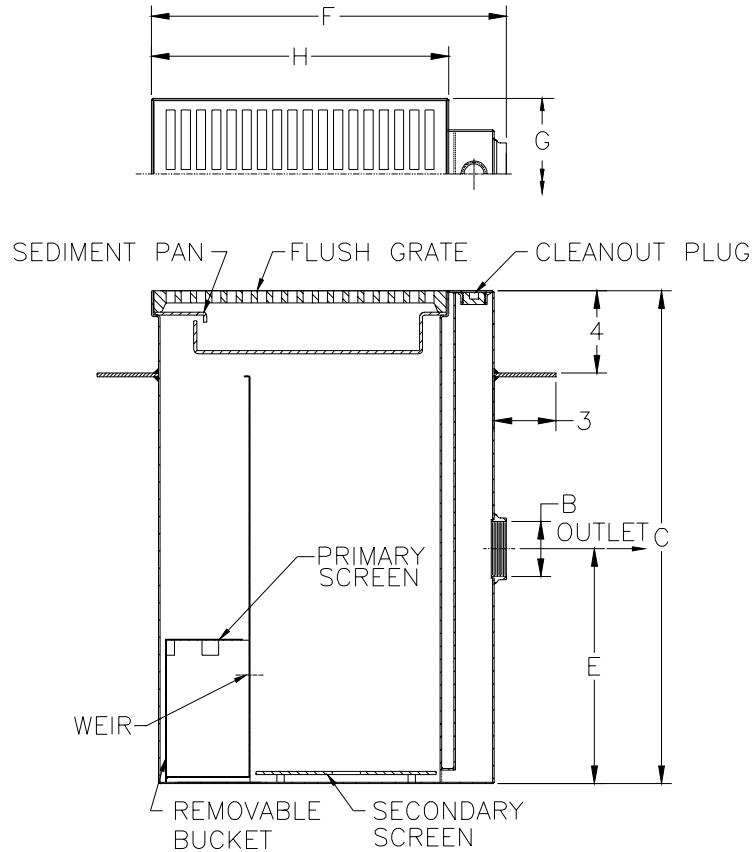

Size	Sludge Capacity Lbs. [kg]	Grate Open Area [cm ²]	No. of Grates	No. of Pans	Approx. Wt. Lbs. [kg]	B Pipe Size	Dimension In Inches				
							C	E	F	G	H
12	12 [5]	49 [316]	1	1	70 [32]	2 [50]	24 [610]	10 1/2 [267]	17 1/8 [435]	11 3/8 [289]	12 3/8 [314]

ENGINEERING SPECIFICATION: ZURN Z-1189-81 Acid Resistant Coated interior and exterior fabricated steel oil/sediment interceptor, w/built-in extension, bronze cleanout plug and visible double wall trap seal, removable sediment bucket, horizontal baffle, anchor flange, with secured Dura-Coated heavy-duty traffic cover (max. safe live load 10,000lbs.).

PREFIXES

___ Z- Standard Assembly* (See Engineering Specification)

SUFFIXES

- ___ -KC Anchor flange with seepage holes and clamp collar.
- ___ -OD Adjustable Oil Drawoff

REV.	DATE: 1/15/01	C.N. NO. 86296
DWG. NO. P-14816 PRODUCT NO. Z-1189-81		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED