




# Z1020-75

## ELECTRONIC TRAP PRIMER W/ 12 OUTLETS

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

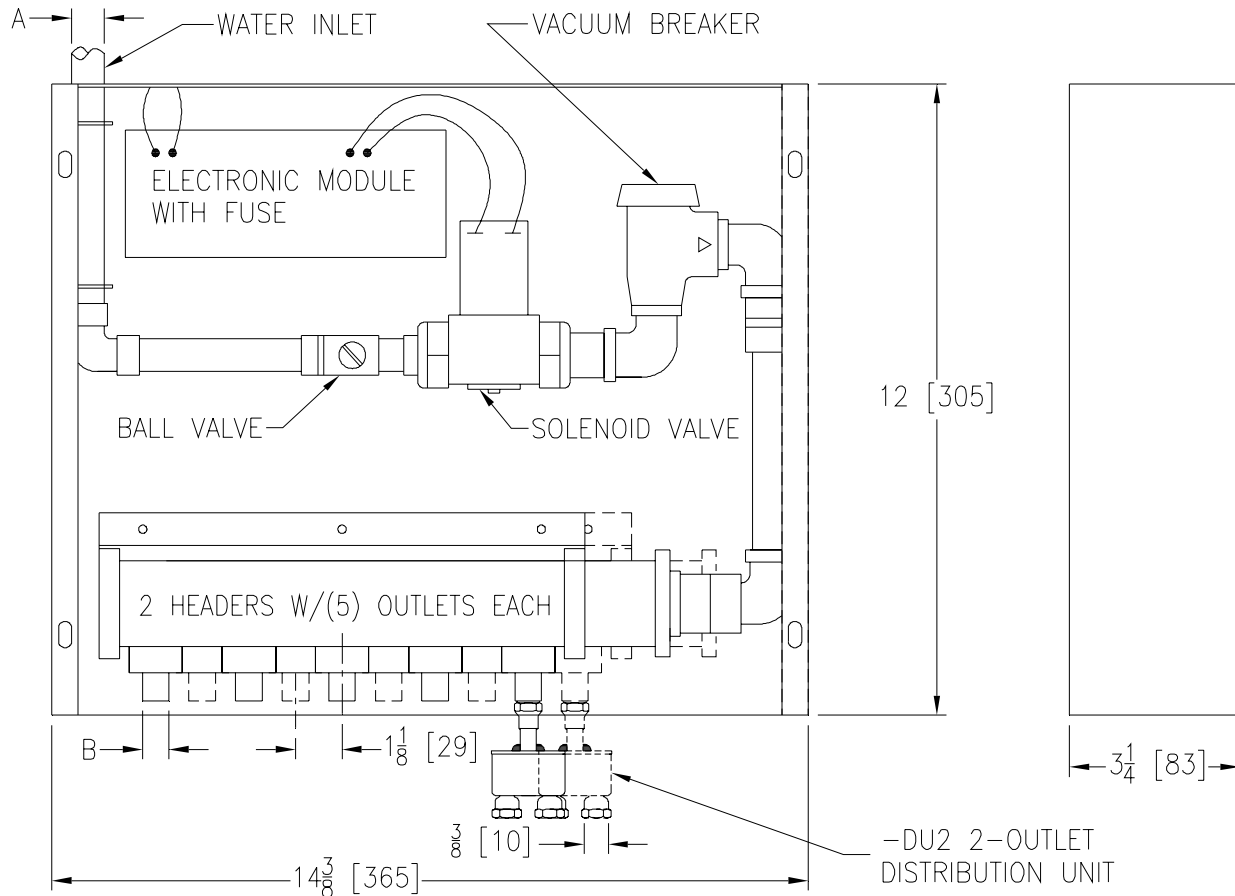

Dimensions in Inches		Approx. Wt. Lbs. [kg]
A	B	
1/2 [13]	1/2 [13]	12 [5]

**ENGINEERING SPECIFICATION: ZURN Z1020-75**

Electronic trap primer programmed as standard to provide a six second water injection to traps every twenty-four hours\*, complete with galvanized steel combination surface or recessed mount box and cover, 1/2 [13] solder copper inlet connection, brass ball type stop valve, slow closing 24 VAC solenoid valve with integral strainer, 120 - 24 VAC transformer, brass atmospheric vacuum breaker, PEX waterway, and two anti-scaling multi-port manifolds with five 1/2 [13] Female I.P.S. outlet connections. Two outlets provided with -DU2 (2-Outlet Distribution Unit) for a total of twelve outlet connections.

Note: Distribution unit outlets are 3/8 [10] N.P.T.

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 6/26/07	C.N. NO. 96858
DWG. NO. P-15442 PRODUCT NO. Z1020-75		