




Z1173-TD-85

SIZE #1000 GREASE INTERCEPTOR WITH GREASE ACCUMULATING CONE AND INLINE SHUTOFF VALVE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

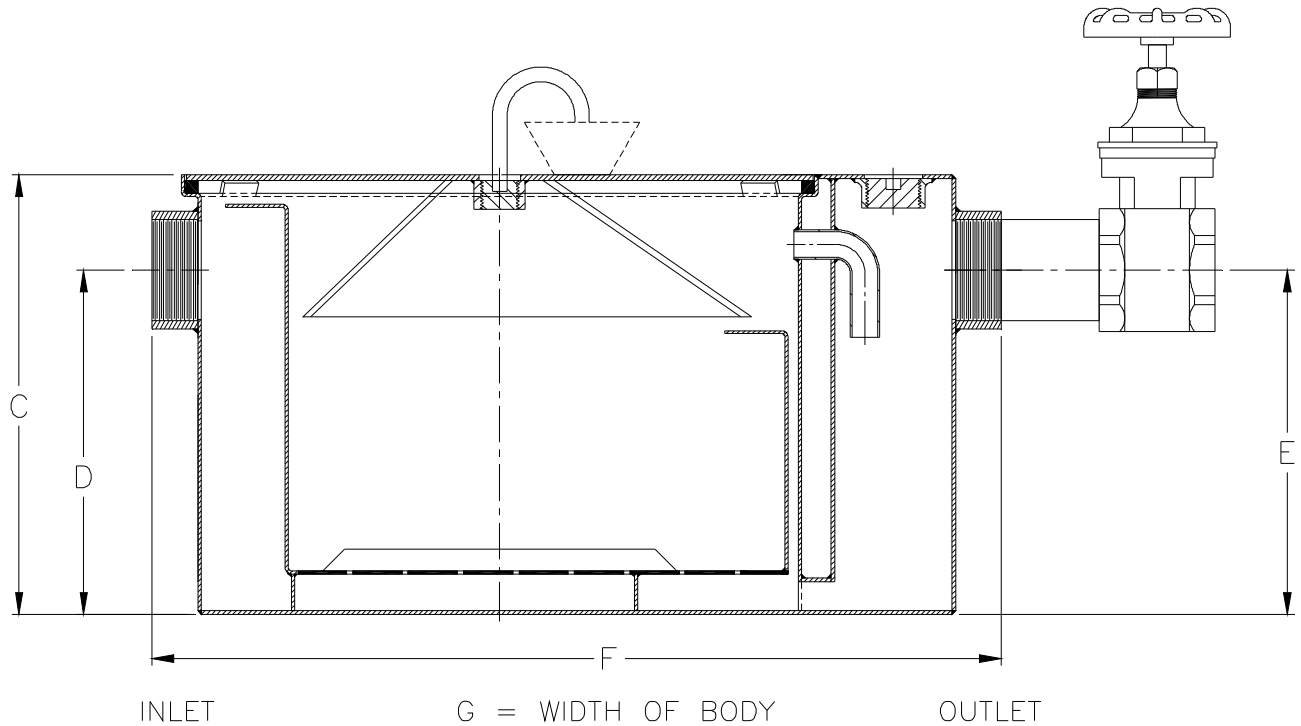

Size	Inlet/ Outlet Size**	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches			
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G
1000	3 [75]	100 [379]	110 [416]	200 [91]	408 [185]	27 [686]	23 [584]	42 3/4 [1086]	33 5/8 [854]

ENGINEERING SPECIFICATION: ZURN Z1173-TD-85 Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at 100 GPM and 200 Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray. Gasketed non-skid secured cover with draw off port having bronze plug, grease accumulating cone, NPT to hose adaptor, 2' [610] flexible hose, hose clamp, and an in line closure valve, complete with Z1108 Flow Control Fitting. Regularly furnished inlet and outlet in high position. Note: Location of outlet from bottom of interceptor cannot be changed.

PREFIXES

_____ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- _____ -L Angle type (Z1108-L) flow control device with plunger (no additional charge).
- _____ -PW Plug wrench.
- _____ -R Acid Resistant Coated interior and exterior fabricated steel recessing receiver for recessed installation, is furnished with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.
- _____ -RE Acid Resistant Coated interior and exterior fabricated steel recessing receiver, enclosed type, for recessed installation. Furnished with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.

** Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. Size #300 will have 3[76] connections reduced to 2[51] and sizes #600 thru #900 will have 4[102] connections reduced to 3[76] as standard. If changed, flow control must be adjusted accordingly.

REV.	DATE: 09/01/10	C.N. NO. 111645
DWG. NO. 302166		PRODUCT NO. Z1173-TD-85

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292