


Z1171-83 LOW PROFILE GREASE INTERCEPTOR W/ ANCHOR FLANGE

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

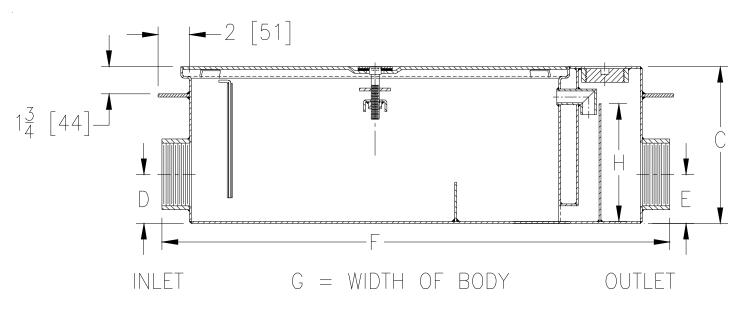

Note: Interceptor must be additionally supported from bottom.

Size	Inlet/ Outlet Size*	Flow Rate	Rate Capacity		Approx.	Dimensions in Inches				
		G.P.M.	Water	Grease	[ka]					
		[L]	Gal. [L]	Lbs. [kg]		С	D/E	F	G	Н
500		20 [76]	15 [60]	40 [18]	102 [46]	10 [254]	3 1/8 [79]	31 [787]	21 1/8 [536]	6 3/4 [171]
700	3* [76]	35 [132]	30 [113]	70 [32]	172 [78]	10 3/4 [273]	3 1/8 [79]	42 1/8 [1070]	29 3/8 [746]	7 [178]
800	1	50 [189]	45 [170]	100 [45]	210 [95]	16 [406]	10 [254]	49 1/2 [1257]	29 3/8 [746]	10 [254]

ENGINEERING SPECIFICATION: ZURN Z1171-83 Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, PDI rated at _____ GPM and _____ Lbs. grease capacity, with internal air relief by-pass, anchor flange, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, and visible double wall trap seal. Gasketed non-skid secured cover, complete with center tie down assembly and Z1108 flow control fitting. Regularly furnished with 3 [76] low inlet and outlet.*

OPTIONS (Check/specify appropriate options)

PREFIXES

- Z Acid Resistant Coated Fabricated Steel*
- ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ____ -L Angle Type (Z1108-L) Flow Control Device with Plunger.
- -KC Anchor Flange 1 3/4 [44] down from top and 2 [51] wide with Clamp Collar.
- _____ -PW Plug Wrench.

	REV.	DATE: 08/1	9/10 C.N. NO. 111543
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO.	301966 PF	RODUCT NO. Z1171-83
ZURN INDUSTRIES, LLC		•	