




Z-1181-80 SOLIDS INTERCEPTOR

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

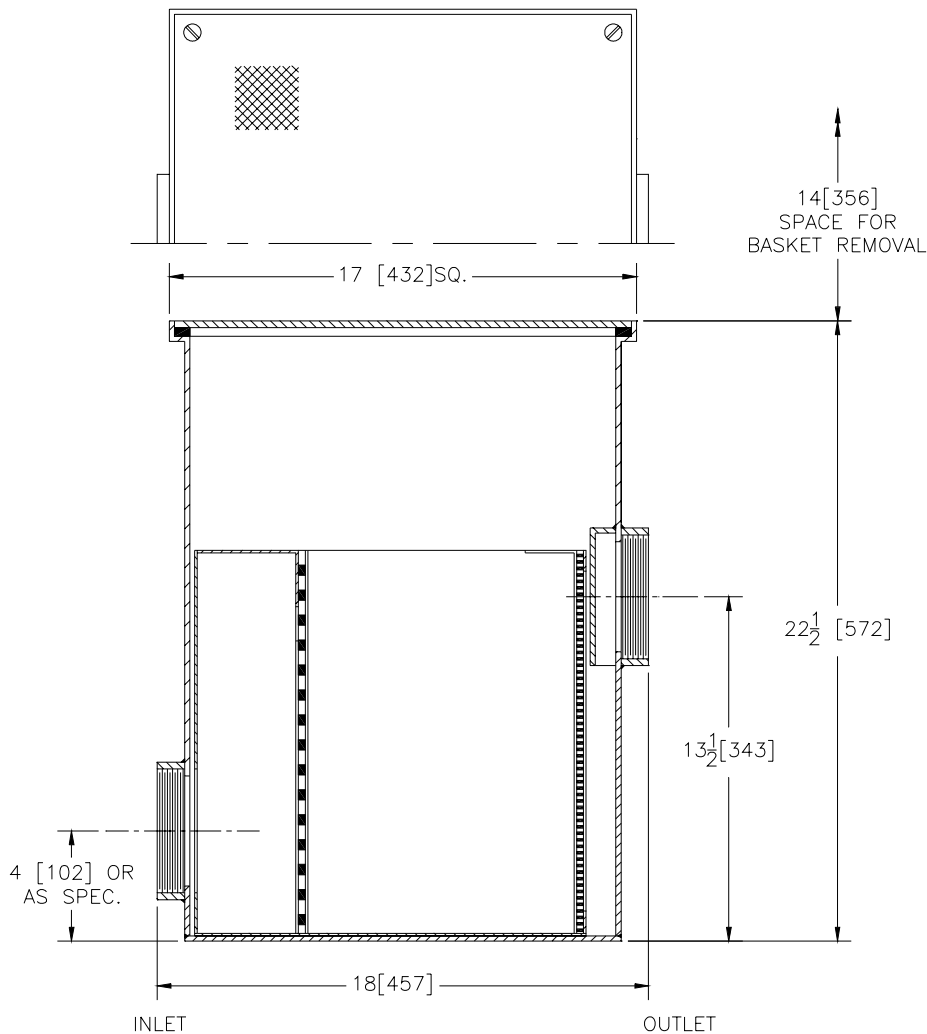

Inlet/Outlet Inches	Flow Rate GPM [L]	Approx. Wt. Lbs. [kg]
3" [76]	30 [113]	40 [18]

ENGINEERING SPECIFICATION: ZURN Z-1181-80 Large capacity Acid Resistant Coated fabricated steel solids interceptor, in lieu of fixture 'P' trap, for on-floor or flush with floor installation, with removable primary and secondary flow diffusing/intercepting screens, and sediment bucket, with gasketed non-skid cover. Regularly furnished with 2 [50] low inlet and high outlet.**

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z- Acid Resistant Coated Fabricated Steel*
- ___ ZS- All Fabricated Type 304 Stainless Steel

SUFFIXES

- ___ -SS Custom Stainless Mesh Screen for Bucket (Specify opening size)
- ___ -YR Replacement Basket Assembly

REV.	DATE: 11/15/96	C.N. NO. 76504
DWG. NO. P-14417 PRODUCT NO. Z-1181-80		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED