




# Z1171-89

## SIZE 800 LOW PROFILE GREASE INTERCEPTOR W/ 4" [102] INLET/OUTLET

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

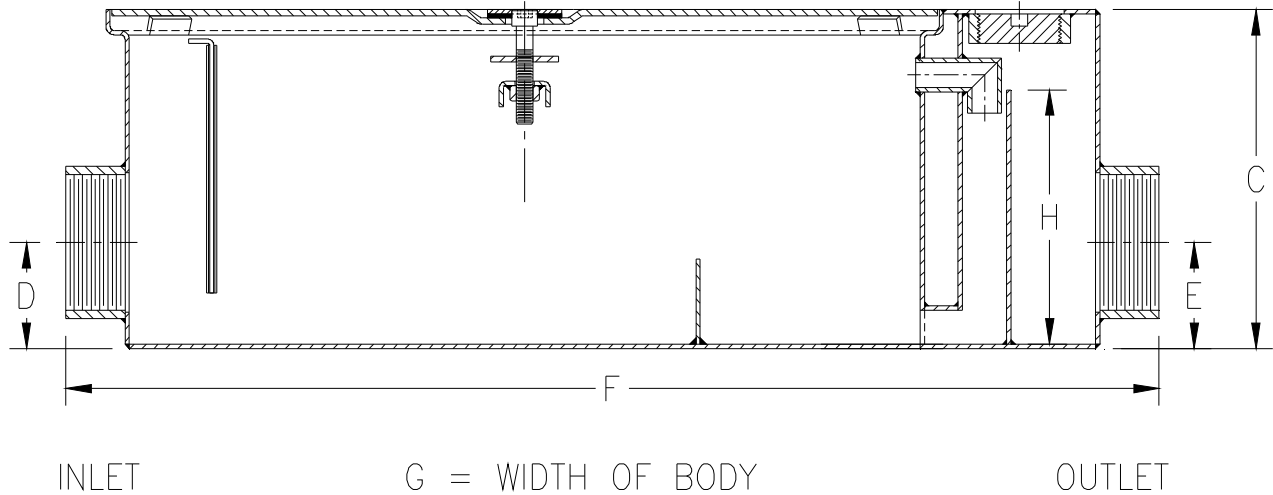

Size	Inlet/Outlet Size* In. [mm]	Flow Rate G.P.M. [LPM]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]				
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G	H
800	4 [102]	50 [189]	45 [170]	100 [45]	210 [95]	16 [406]	10-1/2 [267]	49-7/8 [1267]	29 [737]	10 [254]

### ENGINEERING SPECIFICATION: ZURN Z1171-89

Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, PDI rated at 50 GPM [189 LPM] and 100 Lbs [45 kg]. grease capacity, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, and visible double wall trap seal. Gasketed non-skid secured cover, complete with center tie down assembly and Z1108 flow control fitting. Regularly furnished with 4" [102mm] low inlet and outlet.

**OPTIONS** (Check/specify appropriate options)

### PREFIXES

- \_\_\_ Z Acid Resistant Coated Fabricated Steel\*
- \_\_\_ ZS All Type 304 Fabricated Stainless Steel

### SUFFIXES

- \_\_\_ -L Angle Type (Z1108-L) Flow Control Device with Plunger.
- \_\_\_ -PW Plug Wrench

Caution: Installations using indirect piping to unit could result in standing water in floor sink or flooding if line blockage occurs.

\* Regularly furnished unless otherwise specified.