




**Z-551-80**  
**9" DIAMETER FRESH AIR VENT WITH**  
**DEFLECTOR GRATE**

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

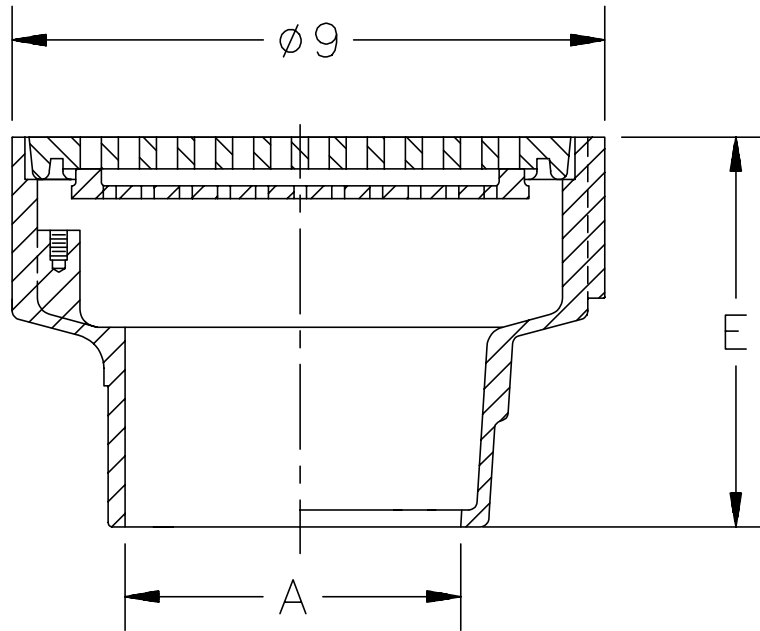

A- Pipe Size In.	Approx. Wt. Lbs.	Grate Open Area Sq. In.
2-3-4	13	18

**ENGINEERING SPECIFICATION:** ZURN Z-551-80 9" Diameter fresh air vent, Dura-Coated cast iron body with bottom outlet, and medium duty slotted grate with deflector grate.

**OPTIONS** (Check/specify appropriate options)

**OUTLET** (Specify type)

- \_\_\_\_\_ **IC** Inside Caulk
- \_\_\_\_\_ **IG** Inside Caulk w/Sealtrol Gskt.
- \_\_\_\_\_ **IP** Threaded
- \_\_\_\_\_ **NH** No-Hub
- \_\_\_\_\_ **NL** Neo-Loc

**PIPE SIZE** (Specify size)

- \_\_\_\_\_ 2", 3", 4"
- \_\_\_\_\_ 2", 3", 4"
- \_\_\_\_\_ 2", 3", 4"
- \_\_\_\_\_ 2", 3", 4"
- \_\_\_\_\_ 2", 3", 4"

**'E' BODY HT. DIMENSION**

- 5-3/4"
- 5-3/4"
- 4"
- 5-3/4"
- 5-1/8"

**PREFIXES**

- \_\_\_\_\_ **Z-** D.C.C.I. Body and Grate\*
- \_\_\_\_\_ **ZB-** D.C.C.I. Body with Polished Bronze Grate (Add 3/16" to E Dim.)
- \_\_\_\_\_ **ZN-** D.C.C.I. Body with Polished Nickel Bronze Grate (Add 3/16" to E Dim.)

**SUFFIXES**

- \_\_\_\_\_ **-AR** Acid Resisting Epoxy Coated Finish
- \_\_\_\_\_ **-DG** Duresist Grate
- \_\_\_\_\_ **-G** Galvanized Cast Iron
- \_\_\_\_\_ **-P** Trap Primer Connection
- \_\_\_\_\_ **-V** Backwater Valve (See Z-1099)
- \_\_\_\_\_ **-VP** Vandal Proof Secured Top
- \_\_\_\_\_ **-90** 90° Threaded Side Outlet Body (2" thru 4")

<b>REV.</b>	<b>DATE: 11/12/93</b>	<b>C.N. NO. 69394</b>
<b>DWG. NO. P-13893 PRODUCT NO. Z-551-80</b>		

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED