


SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

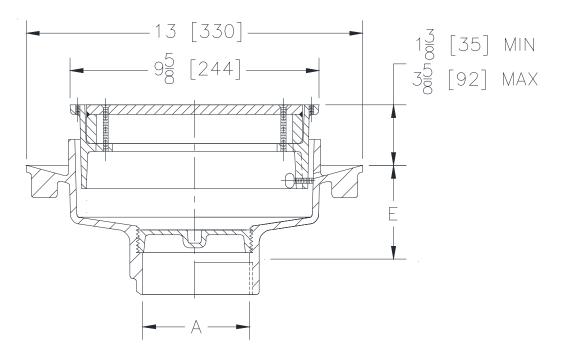

A - Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	E / f
2,3,4,6[51,76,102,152]	40 [18]	5

ENGINEERING SPECIFICATION: ZURN Z1732-SC-33

All Type 304 (CF8) stainless steel adjustable floor drain with integral anchor flange, adjustable top frame for deep flange secured solid cover and stainless steel closure plug with plain finish.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET	'E' BODY HT. DIM.
2 ,3,4 [51,76,102]	IP Threaded	6 [152]
6 [152]	IP Threaded	6-3/8 [162]
2 ,3,4 [51,76,102]	NH No-Hub	6 [152]
6 [152]	NH No-Hub	6-3/8 [162]

PREFIXES

Z	Type 304 (CF8) Stainless Steel Body*
---	--------------------------------------

____ ZM Type 316 (CF8M) Stainless Steel Body

SUFFIXES

- -K
 Anchor Flange w/ Seepage Holes

 -KC
 Anchor Flange w/ Seepage Holes and Clamp Collar

 -VP
 Vandal Proof Secured Top
- _____ -Y Sediment Bucket

* Regularly furnished unless otherwise specified.