




Z1188-ST-107

150 GPM LARGE CAPACITY OIL INTERCEPTOR W/
INTEGRAL STORAGE TANK, 16" [406] INTEGRAL
EXTENSION, ANCHOR FLANGE, AND HEAVY-DUTY
COVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

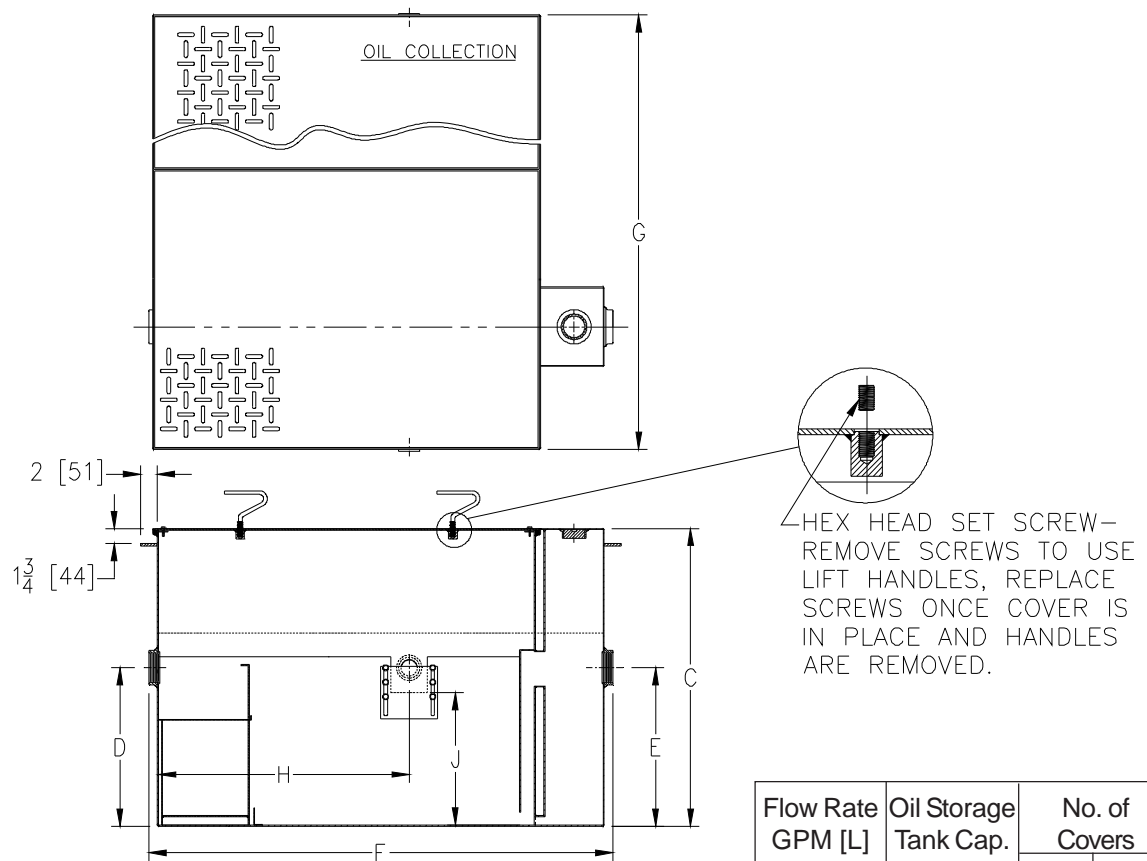

Flow Rate GPM [L] Min.	Oil Storage Tank Cap. Gal. [L]	No. of Covers	
		Trap	Tank
150 [568]	250 [946]	2	2

Flow Rate GPM [LPM] Min.	Inlet / Outlet Size	Water Capacity Gal. [L]	Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]					
				C	D/E	F	G	H	J
150 [568]	4 [102]	235 [890]	2100 [953]	49-3/4 [1264]	25-1/4 [641]	68-1/4 [1734]	82-3/4 [2102]	38-11/16 [983]	21-5/8 [549]

ENGINEERING SPECIFICATION: ZURN Z1188-ST-107

Acid Resistant Coated interior and exterior fabricated steel 150 GPM [568 LPM] oil interceptor, with integral extension, anchor flange, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, oil draw-off, vent connections, secured gasketed heavy-duty non-skid traffic cover rated at 10,000 lbs. [4536 kg.] maximum safe live load, complete with flow control fitting and left hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ -KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar.
___ -STR Storage tank on right hand side when facing the inlet.

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. -
Date: 12/04/18
C.N. No. 140897
Prod. | Dwg. No. Z1188-ST-107