

LARGE CAPACITY GREASE INTERCEPTOR WITH 8 [203] INLET & OUTLET


Z1172-85

SPECIFICATION SHEET

TAG

PRODUCTNO. Z1172-85

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

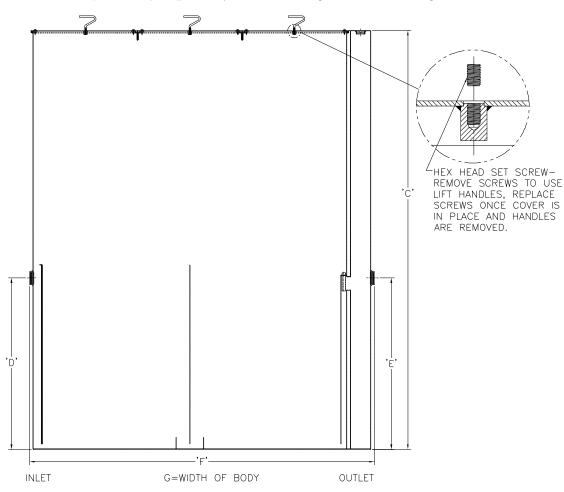

Size		Flow Rate G.P.M.[L]	Capacity		Number	Approx Wt. Lbs.	Dimension in Inches			
			Water Gal. [L]	Grease lbs. [Kg.]	Covers	[Kg.]	С	D/E	F	G
1900	8 [203]	500 [1893]	1440 [5451]	1000 [454]	3	2857 [1296]	126 1/4 [321]	51 5/8 [1311]	104 [2542]	74 [1880]

ENGINEERING SPECIFICATION: ZURNZ1172-85

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at _____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/ flow diffusing baffle. Gasketed non-skid secured covers with removable lift handles and enzyme port having bronze plug, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

OPTIONS (Ch	neck/specify appropriate options)	
PREFIXES		
Z	Acid Resistant Coated Fabricated Steel*	
SUFFIXESEHDKKC	Acid Resistant Coated exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation. Heavy duty traffic cover rated at 10,000 lbs. [4536 Kg.] maximum safe live load. Anchor flange 1-3/4 [44] down from top and 2 [51] wide. No extension height required to accommodate (-K) option. Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. No extension is required to accommodate (-KC) option. Angle type (Z1108-L) flow control device. REV. A DATE: 08/08/06 C.N. NO. 95412	

DWG. NO. P-14086