




**Z-1173-96  
ADJUSTABLE RECESSING  
RECEIVER FOR GREASEPTOR**

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

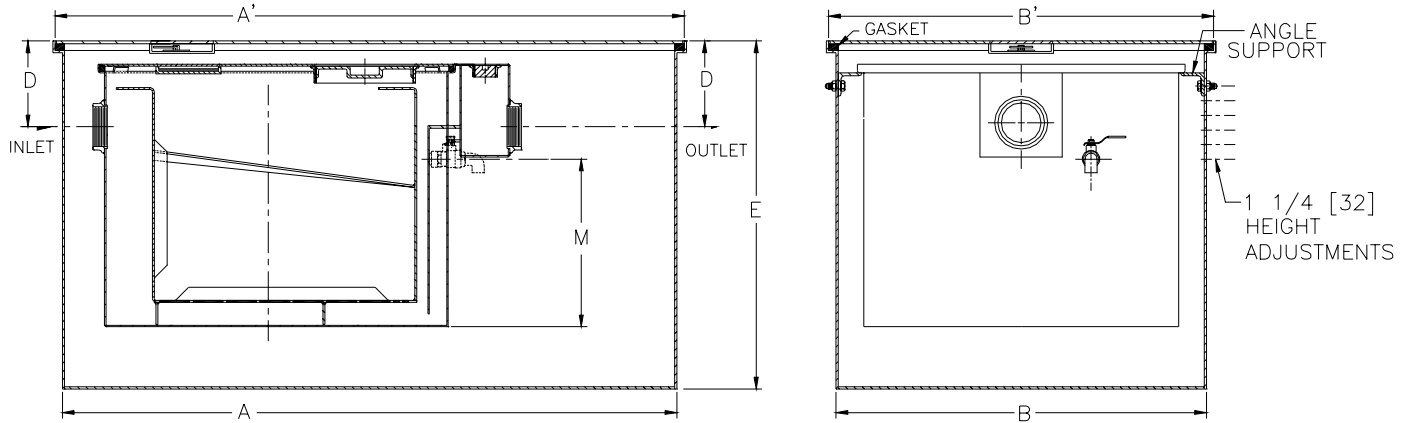

Size	Inlet/ Outlet Size	Dimensions in Inches [mm]						
		A	A'	B	B'	D	E	M
1000	3 [75]	48 3/4 [1238]	50 3/4 [1289]	37 1/8 [943]	39 1/8 [994]	6[152] min	36 [914]	18 1/2 [470]

**ENGINEERING SPECIFICATION:** ZURN Z-1173-96 Acid Resistant Epoxy Coated Recessing receiver, enclosed type, equipped with adjustable support brackets, and gasketed non-skid cover with recessed and covered lift handle. Complete with Z-1172 large capacity grease interceptor with grease retention tray adjacent to grease draw-off valve and Z-1108 flow control fitting. For greaseptor specifications, see Z-1172 drawing.

**PREFIXES**

\_\_\_\_\_ **Z-** Acid Resistant Coated Fabricated Steel\*

**SUFFIXES**

- \_\_\_\_\_ **-HD** Heavy Duty Traffic Cover Rated at 10,000 lbs. Maximum Safe Live Load.
- \_\_\_\_\_ **-K** Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- \_\_\_\_\_ **-KC** Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- \_\_\_\_\_ **-L** Angle Type (Z-1108-L) Flow Control Device.

<b>REV.</b>	<b>DATE: 4/17/02</b>	<b>C.N. NO. 88444</b>
<b>DWG. NO. P-14887 PRODUCT NO. Z-1173-96</b>		

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED