




Z-1186-101 OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK AND INLET CATCH BASIN

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

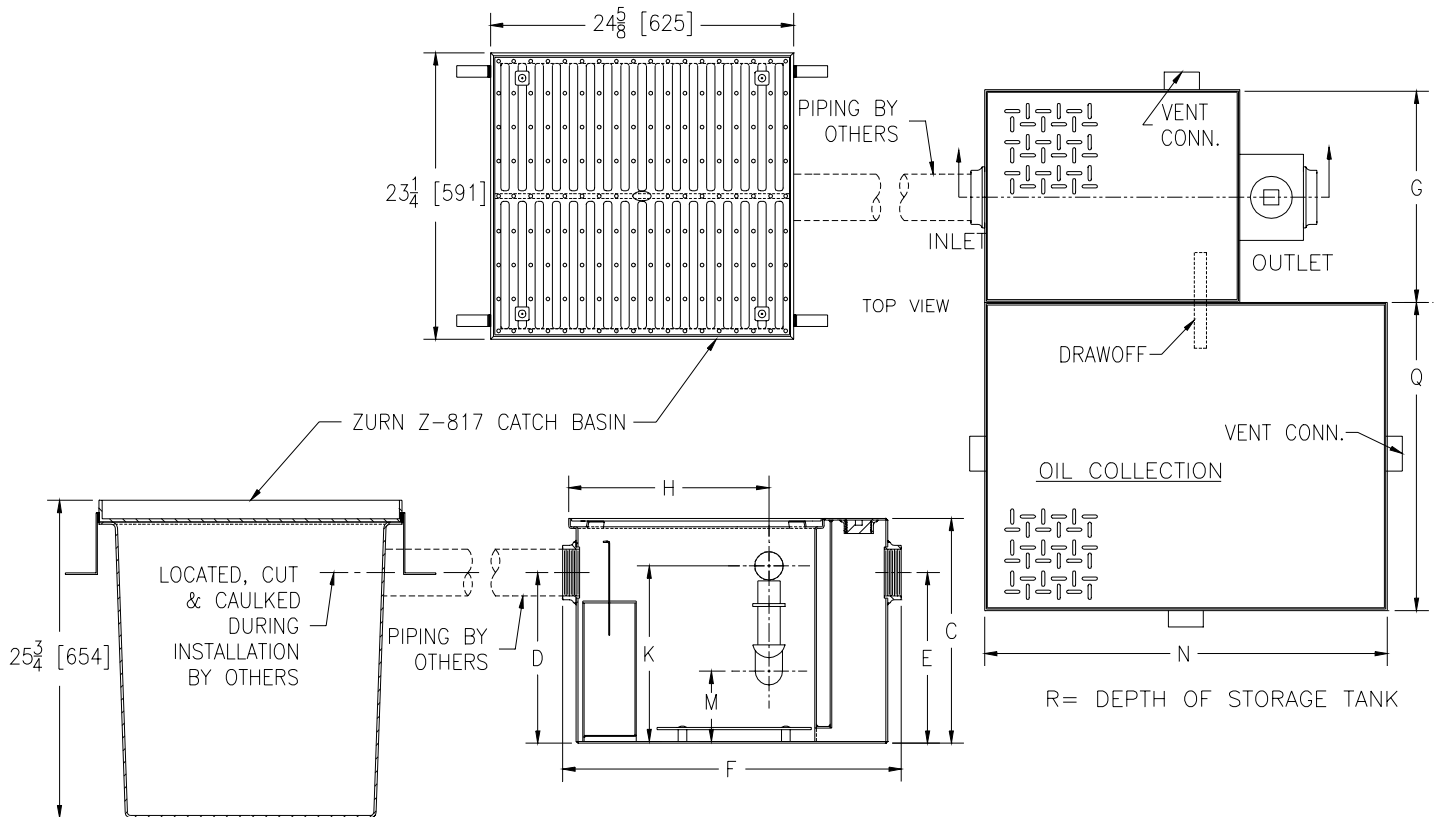

SIZE	Inlet/Outlet Size**	Flow Rate G.P.M.	Water Capacity Gal.[L]	Oil Storage Tank Capacity Gal.[L]
800	3 [76]	50 [189]	30 [114]	550 [2082]

Dimensions in inches										
SIZE	C	D/E	F	G	H	K	M	N	Q	R
800	24 1/4 [616]	14 1/4 [362]	31 3/4 [806]	22 1/2 [572]	17 1/4 [438]	21 1/4 [540]	8 3/16 [208]	67 [1702]	46 [1168]	58 1/2 [1486]

ENGINEERING SPECIFICATION: ZURN Z-1186-101 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position. Provided with ZURN Z-817 24[610] x 24[610] x 24[610] polyester catch basin with heavy duty frame and ductile grate.

OPTIONS (Check/specify appropriate options)

PREFIXES

- **Z-** Acid Resistant Coated Fabricated Steel
- ****** Inlet and outlet size shown indicates standard operating size and flow control setting. Size #800 will have 3 [76] connections as standard. If changed, flow control must be adjusted accordingly.

REV.	DATE: 11/18/98	C.N. NO. 81742	
DWG. NO. P-14683	PRODUCT NO. Z-1186-101		