




Z1181-88

SOLIDS INTERCEPTOR W/ EXTENDED HEIGHT

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

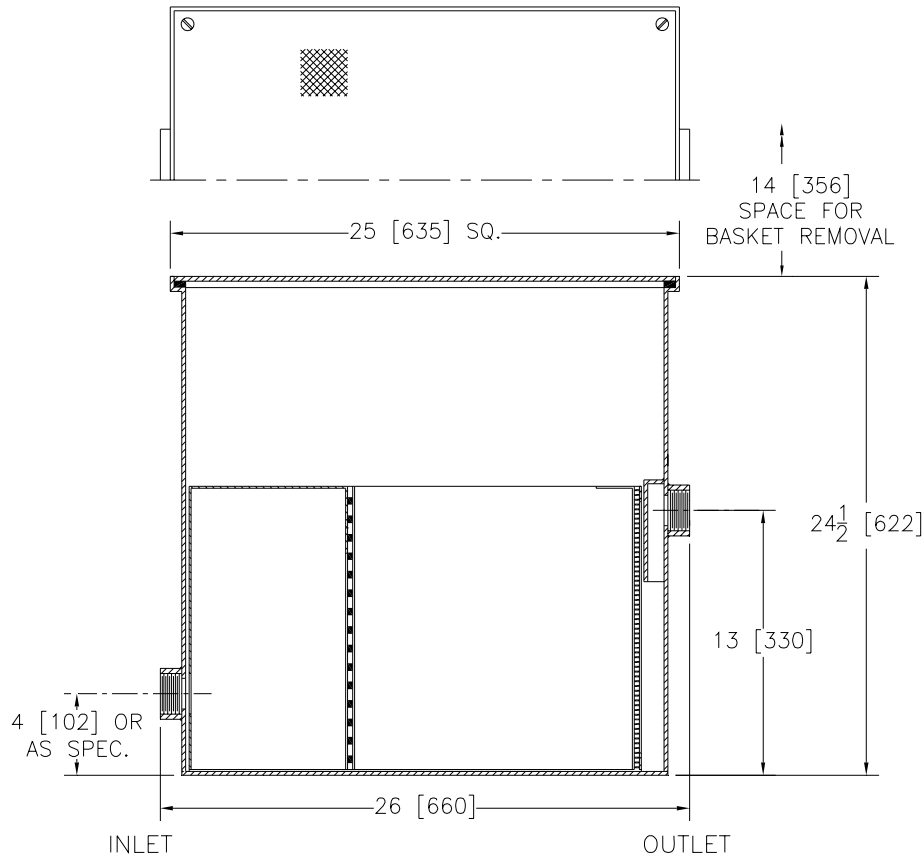

Inlet/Outlet Inches	Flow Rate GPM [L]	Approx. Wt. Lbs. [kg]
3 [76]	40 [151]	190 [86]

ENGINEERING SPECIFICATION: ZURN Z1181-88 Large capacity Acid Resistant Coated interior and exterior fabricated steel solids interceptor, in lieu of fixture 'P' trap, for on-floor or flush with floor installation. Furnished with a removable Acid Resistant Coated fabricated steel bucket having removable primary (1/4 [6] dia. holes) and secondary (3/16 [5] dia. holes) flow diffusing/intercepting screens, and complete with a top access gasketed secured cover with two removable lift handles, furnished with 3 [76] low inlet and high outlet**.

OPTIONS (Check/Specify appropriate options)

PREFIXES

___ Z Standard Assembly* (See Engineering Specification)

SUFFIXES

___ -CS Custom Screens (Specify material & perforation size required)
 ___ -R Acid Resistant Coated Interior and Exterior Fabricated Steel Recessing Receiver for Recessed Installation is Equipped with Adjustable Support Brackets and Gasketed Non-Skid secured cover with Covered Recessed Lift Handle
 ___ -SS Stainless Steel Perforated Screens for Bucket (Specify perforation size)
 ___ -YR Replacement Basket Assembly with Perforated Screens

REV. DATE: 4/12/06 C.N. NO. 95022

DWG. NO. P-15266 PRODUCT NO. Z1181-88

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED