



Z415B-DP-127


BODY ASSEMBLY W/ "TYPE B" STRAINER AND
12 [305] DECK PLATE

SPECIFICATION SHEET

TAG _____

**PATENT
PENDING**

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

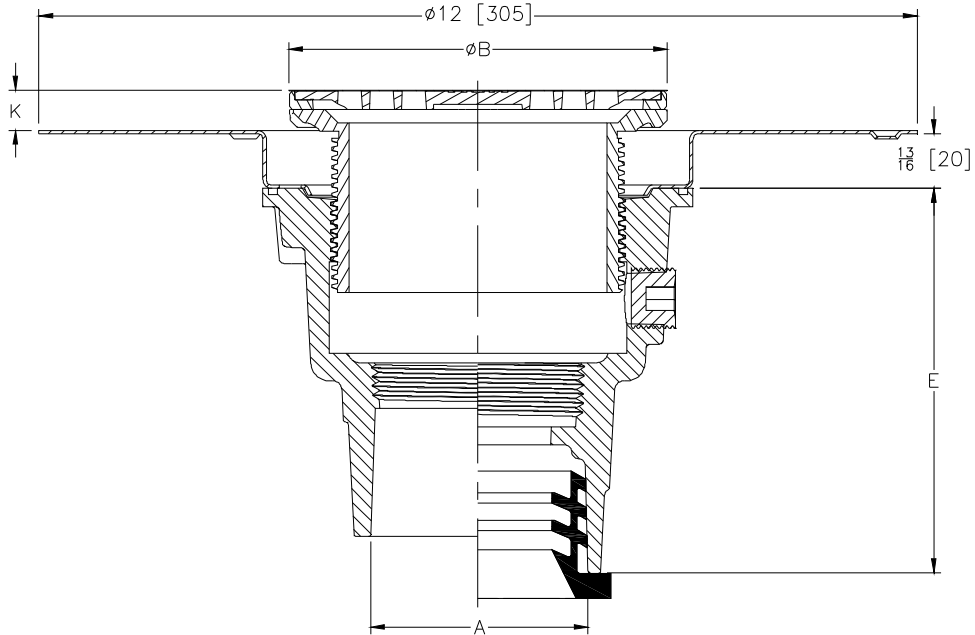

Dimensions In Inches [mm]				Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In [cm ²]
A Pipe Size	B Strainer Dia.	K			
		Min.	Max.		
2,3,4 [51,76,102]	5 [127]	0	1-7/16 [37]	11 [5]	6-1/4 [40]

ENGINEERING SPECIFICATION: Zurn Z415B-DP-127

Floor and shower drain, Dura-Coated cast iron body with bottom outlet, 12" [305mm] diameter stainless steel deck plate, and "Type B" polished nickel bronze light duty top assembly.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

(Specify size/type) **OUTLET**

'E' BODY HT. DIM.

2 [51]	___ NH	No-Hub	4-7/8 [124]
3 [76]	___ NH	No-Hub	4-3/4 [121]
4 [102]	___ NH	No-Hub	4 [102]
2 [51]	___ NL	Neo-Loc	5-1/4 [133]
3 [76]	___ NL	Neo-Loc	4-3/8 [111]
4 [102]	___ NL	Neo-Loc	4-3/8 [111]

PREFIXES

- ___ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
- ___ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*
- ___ ZS D.C.C.I. Body Assembly w/ Polished Stainless Steel Top

SUFFIXES

- ___ -AR Acid Resisting Epoxy Coated Cast Iron
- ___ -CC Stainless Steel Clamp Collar
- ___ -EF 3/4 [19] Extension Frame
- ___ -FI Floor Insert
- ___ -G Galvanized Cast Iron
- ___ -P Trap Primer Connection (1/2* [13])
- ___ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Outlet Only)
- ___ -U 2 to 3-1/4 [51 to 83] High Extension Adapter
- ___ -VP Vandal-Proof Secured Top
- ___ -Y Sediment Bucket

* Regularly furnished unless otherwise specified.