




# Z1170-165

SIZE 700 GREASE INTERCEPTOR  
W/ Ø4 [102] INLET / OUTLET, EXTENSION, AND  
ANCHOR FLANGE W/ CLAMP COLLAR

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

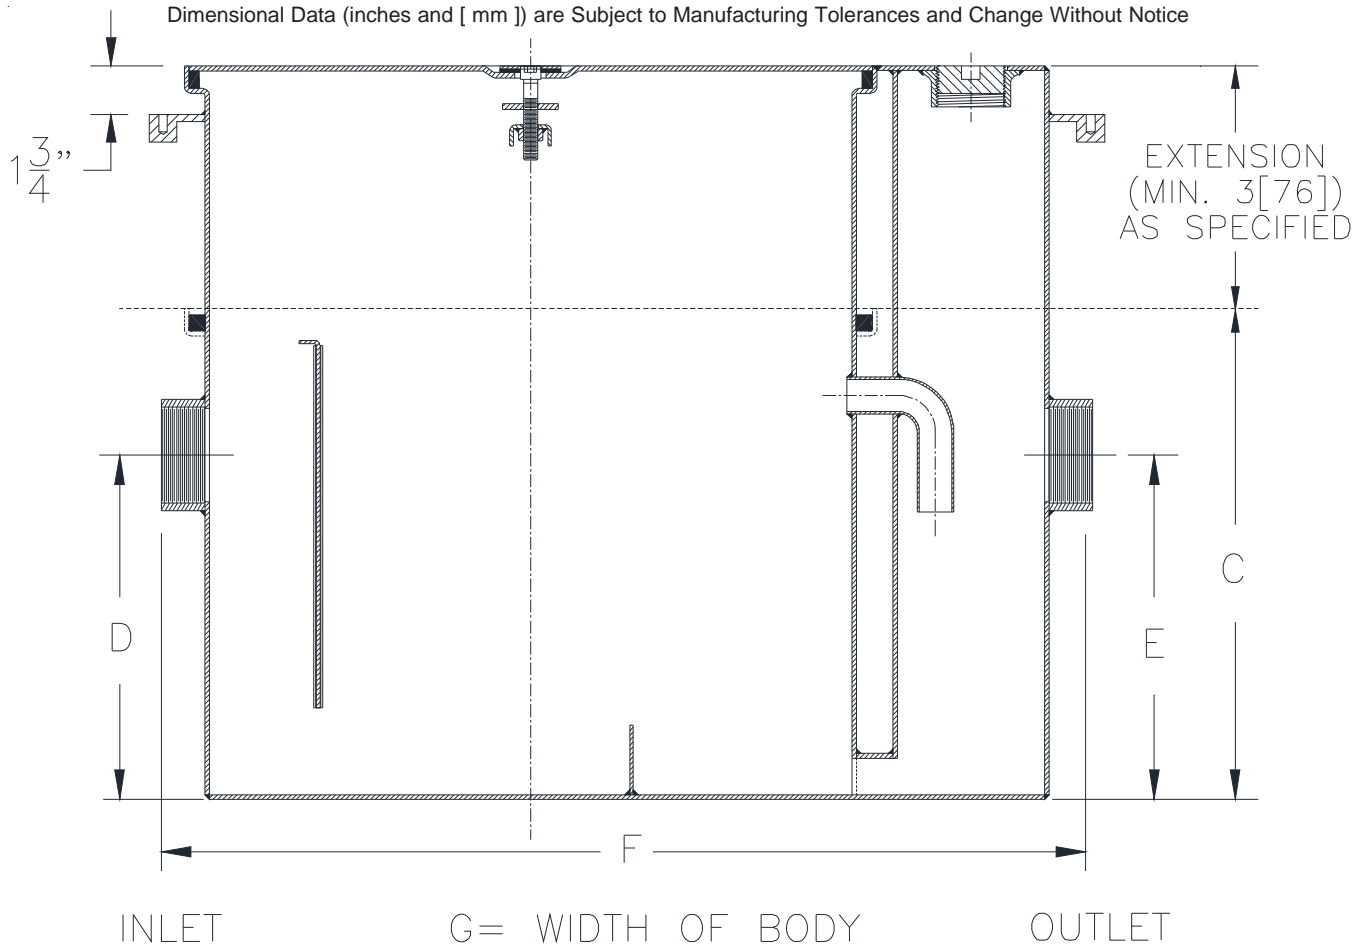

Size	Inlet/ Outlet Size*	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches			
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G
700	4 [102]	35 [132]	30 [113]	70 [32]	151 [68]	18-3/4 [476]	14-3/4 [375]	34-1/8 [867]	22-1/2 [572]

**ENGINEERING SPECIFICATION:** ZURN Z1170-165

Acid Resistant Coated interior and exterior fabricated steel grease interceptor, PDI, rated at 35 GPM [113] and 70 Lbs. [32kg] grease capacity, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, and visible double wall trap seal. Gasketed non-skid secured cover complete with center tie down assembly, with Z1108 flow control fitting. Regularly furnished with a high inlet and outlet connection and extension. Note: Location of outlet from bottom of interceptor cannot be changed.

**PREFIXES**

- Z Acid Resistant Coated Fabricated Steel\*
- ZS All Type 304 Fabricated Stainless Steel

**SUFFIXES**

- -AL Aluminum Cover
- -DI Dual High/Low Inlet.
- -HD Heavy Duty Cover rated at 10,000 lbs. [4536 kg] maximum safe live load. A 3 [76] minimum extension height is required when Heavy-Duty Cover (-HD) option is specified.
- -L Angle type (Z1108-L) flow control device with plunger.
- -R Acid resistant coated interior and exterior fabricated steel recessing receiver for recessed installation is equipped with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.
- -RE Acid resistant coated interior and exterior fabricated steel recessing receiver enclosed type for recessed installation. Furnished with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.
- -T Cover recessed for tile/terrazzo. A 3 [76] minimum extension height is required. (Specify recess depth - 1/8 [3], 3/4 [19], or 1-1/4 [32]).

\* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation  
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929  
In Canada | Zurn Industries Limited  
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292  
[www.zurn.com](http://www.zurn.com)

Rev. -  
Date: 05/03/2017  
C.N. No. 136787  
Prod. | Dwg. No. Z1170-165