


Z1172-UN-77 SIZE 1700 LARGE CAPACITY GREASE INTERCEPTOR W/SIDE OUTLET, USER NOTIFICATION SYSTEM, AND INTEGRAL 54" EXTENSION

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

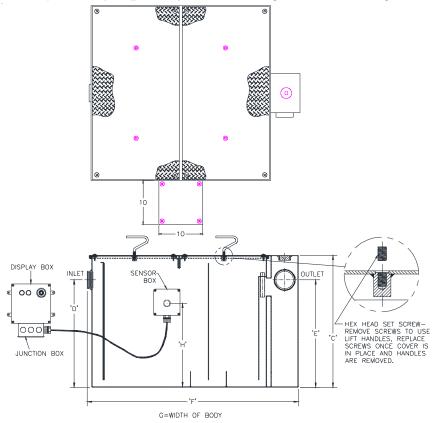

	Inlet/Outlet	Flow Rate	Capacity		Approx	Dimensions in Inches [mm]				
Size	Size	GPM	Water	Grease	Wt.	C	D/E	Е	G	Н
	in [mm]	[LPM]	Gal [L]	lbs [kg]	lbs [kg]	J	D/L	Г	0	
1700	6[152]	400 [1512]	1095 [4139]	800 [363]	2440 [1108]	111-1/4 [2826]	47-5/8[1210]	94 [2388]	67 [1702]	39-3/4 [1010]

ENGINEERING SPECIFICATION: ZURN Z1172-UN-77

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at _____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured covers with removable lift handles, complete with flow control fitting. Includes encased fiberglass sensor box containing an electronic grease level sensor (specify right or left side)*, a fiberglass display box with one green power light, red grease level light, audio alarm and junction box. Furnished with inlet and side outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- Z Acid Resistant Coated Fabricated Steel*
- ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- -AL Aluminum Cover
- -L Angle type (Z1108-L) flow control device.
- -PW Plug Wrench

Note:

- *1. Sensor box is mounted on the left or right hand side of the unit when facing inlet (must be specified).
- 2. Power supply 120V GFCI.
- 3. <u>Recommended Installations</u>: Sitting on the floor or recessed in a pit only. (A pit installation requires that a drain or sump pump be installed to keep the pit relatively dry).
- 4. Location of inlet from bottom of interceptor cannot be changed.
- * Regularly furnished unless otherwise specified.