




Z1171-93

SIZE 700 LOW PROFILE GREASE INTERCEPTOR W/ 4 [102] INLET/OUTLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

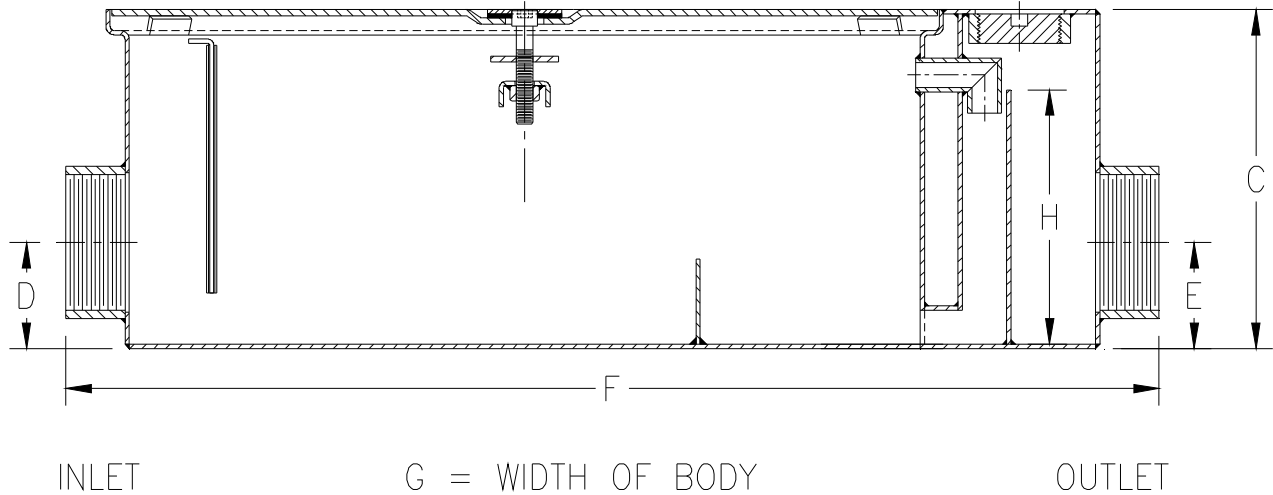

Size	Inlet/Outlet Size* In. [mm]	Flow Rate G.P.M. [LPM]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]				
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G	H
700	4 [102]	35 [159]	30 [114]	70 [32]	172 [78]	10-3/4 [273]	3-1/8 [79]	42-1/8 [1070]	29-3/8 [746]	7 [178]

ENGINEERING SPECIFICATION: ZURN Z1171-93

Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, PDI rated at 35 GPM [114 LPM] and 70 Lbs [32 kg]. grease capacity, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, and visible double wall trap seal. Gasketed non-skid secured cover, complete with center tie down assembly and Z1108 flow control fitting. Regularly furnished with 4" [102mm] low inlet and outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -L Angle Type (Z1108-L) Flow Control Device with Plunger.
- ___ -PW Plug Wrench

Caution: Installations using indirect piping to unit could result in standing water in floor sink or flooding if line blockage occurs.

* Regularly furnished unless otherwise specified.