




# Z-1185-89 LINT INTERCEPTOR

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

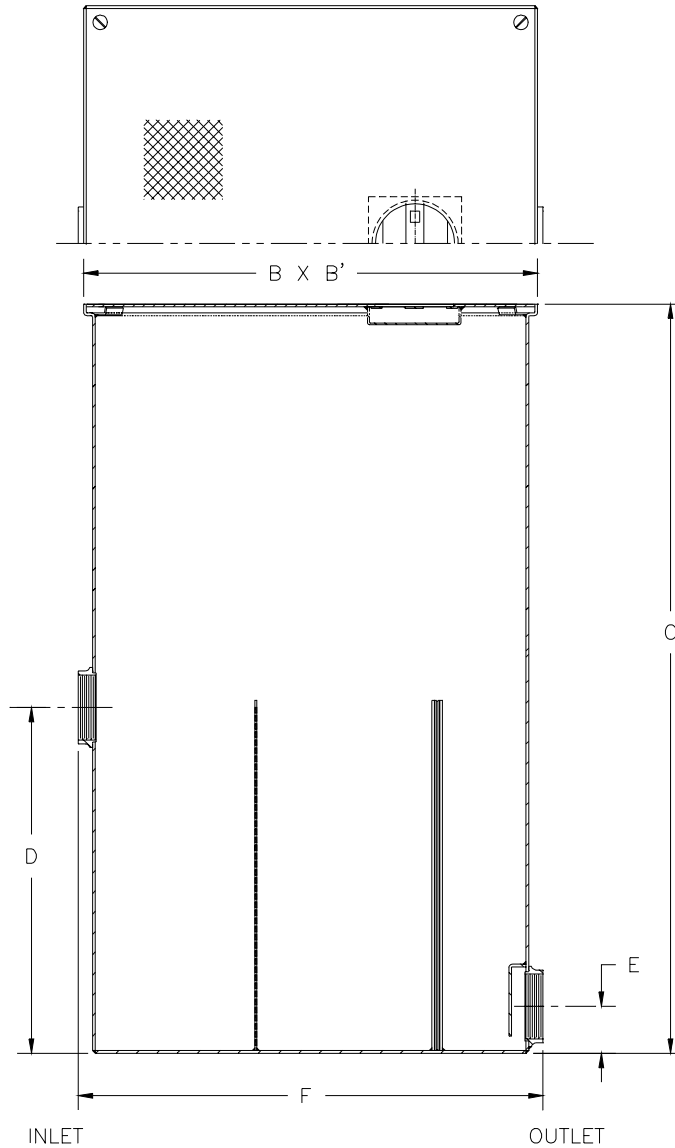

Size No. of Machines	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
7	3 [75]	70 [265]	185 [84]	25 [635]	25 [635]	44 [1118]	17 [432]	3 1/4 [82]	25 1/2 [648]

**ENGINEERING SPECIFICATION:** ZURN Z-1185-89 Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

\_\_\_\_ Z- Acid Resistant Coated Fabricated Steel\*

**SUFFIXES**

\_\_\_\_ RS- Stainless Steel Screen Replacement Assembly

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

<b>REV.</b>	<b>DATE: 11/15/01</b>	<b>C.N. NO. 88176</b>
<b>DWG. NO. P-14855 PRODUCT NO. Z-1185-89</b>		