




# Z1172-135

## LARGE CAPACITY GREASE INTERCEPTOR W/ EXTENSION, HEAVY-DUTY COVER & ANCHOR FLANGE

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

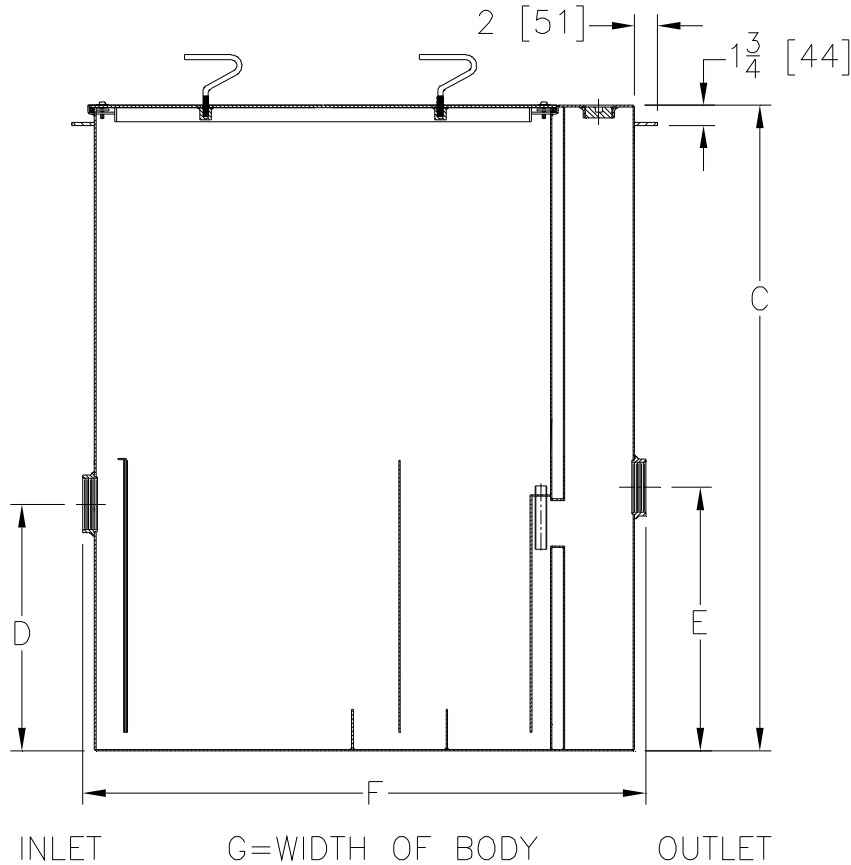

Size	Inlet/ Outlet Size	Flow Rate G.P.M. [L]	Capacity		No. of Covers	Approx. Wt. Lbs. [kg]	Dimensions in Inches			
			Water Gal. [L]	Grease Lbs. [kg]			C	D/E	F	G
1000	4 [102]	100 [378]	110 [416]	200 [91]	1	856 [389]	56 3/8 [1432]	23 [584]	42 3/4 [1086]	33 5/8 [854]

**ENGINEERING SPECIFICATION:** ZURN Z1172-135 Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor with anchor flange, rated at \_\_\_\_ GPM and \_\_\_\_ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Secured gasketed non-skid heavy-duty cover rated at 10,000 lbs [4536 kg] maximum safe live load with removable lift handles and flow control fitting. Regularly furnished with inlet and outlet in high position.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

- \_\_\_\_ Z Acid Resistant Coated Fabricated Steel\*
- \_\_\_\_ ZS All Type 304 Fabricated Stainless Steel

**SUFFIXES**

- \_\_\_\_ -AL Aluminum Cover
- \_\_\_\_ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- \_\_\_\_ -L Angle type (Z1108-L) flow control device.
- \_\_\_\_ -RE Acid Resistant Coated Interior and exterior fabricated steel recessing receiver enclosed type for recessed installation. Furnished with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.

<b>REV.</b>	<b>DATE: 2/24/06</b>	<b>C.N. NO. 94823</b>
<b>DWG. NO. P-15253</b>		<b>PRODUCT NO. Z1172-135</b>

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED