


Z352-76

SPECIFICATION SHEET

TAG

61/8[156] DIAMETER MULTI-STAGE PLANTING AREA DRAIN W/ 15 [381] DIAMETER LOWER BODY

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

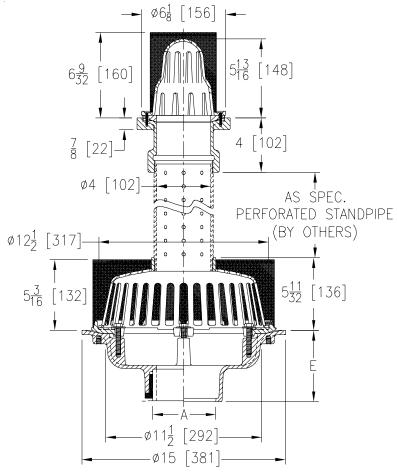

A Pipe Size In.	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm²]	
		Upper	Lower
2-3-4[51-76-102]	34 [15]	20 [126]	103 [665]
5-6[125-150]	35 [16]		

ENGINEERING SPECIFICATION: ZURN Z352-76

6 1/8 [156] Diameter Planting area drain, Dura-Coated cast iron body with threaded outlet and high plain bronze dome with stainless steel mesh screen. Lower body is a dura-coated cast iron 15 [381] diameter body with combination membrane flashing clamp/gravel guard with secured low silhouette cast iron dome, stainless steel mesh screen and 4 [102] dia. perforated standpipe with 3/8 [10] dia. holes (by others).

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET	E BODY HT. DIM.
2 thru 6 [51 thru 152,203]	IC Inside Caulk	5 1/4 [133]
2 thru 6 [51 thru 152,203]	IP Threaded	3 3/4 [95]
2 thru 6 [51 thru 152,203]	NH No-Hub	5 1/4 [133]
2,3,4[51,76,102]	NL Neo-Loc	4 9/16 [116]
6 [152]	NL Neo-Loc	5 7/16 [112]
PREFIXES ZRB D.C.C.I. Body with Bronze Dome an	d Stainless Steel Mesh Screen.*	

SUFFIXES

- -C Underdeck Clamp Roof Sump Receiver -R Vandal-Proof Secured Top

REV. DATE: 3/20/08 C.N. NO. 98262 DWG. NO. P-15531 PRODUCT NO. Z352-76

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED