




Z1188-127

SPECIFICATION SHEET

LARGE CAPACITY OIL INTERCEPTOR W/INTEGRAL STORAGE TANK, INTEGRAL EXTENSION, AND OIL LEVEL SENSOR

TAG _____

Dimensional Data (inches or [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

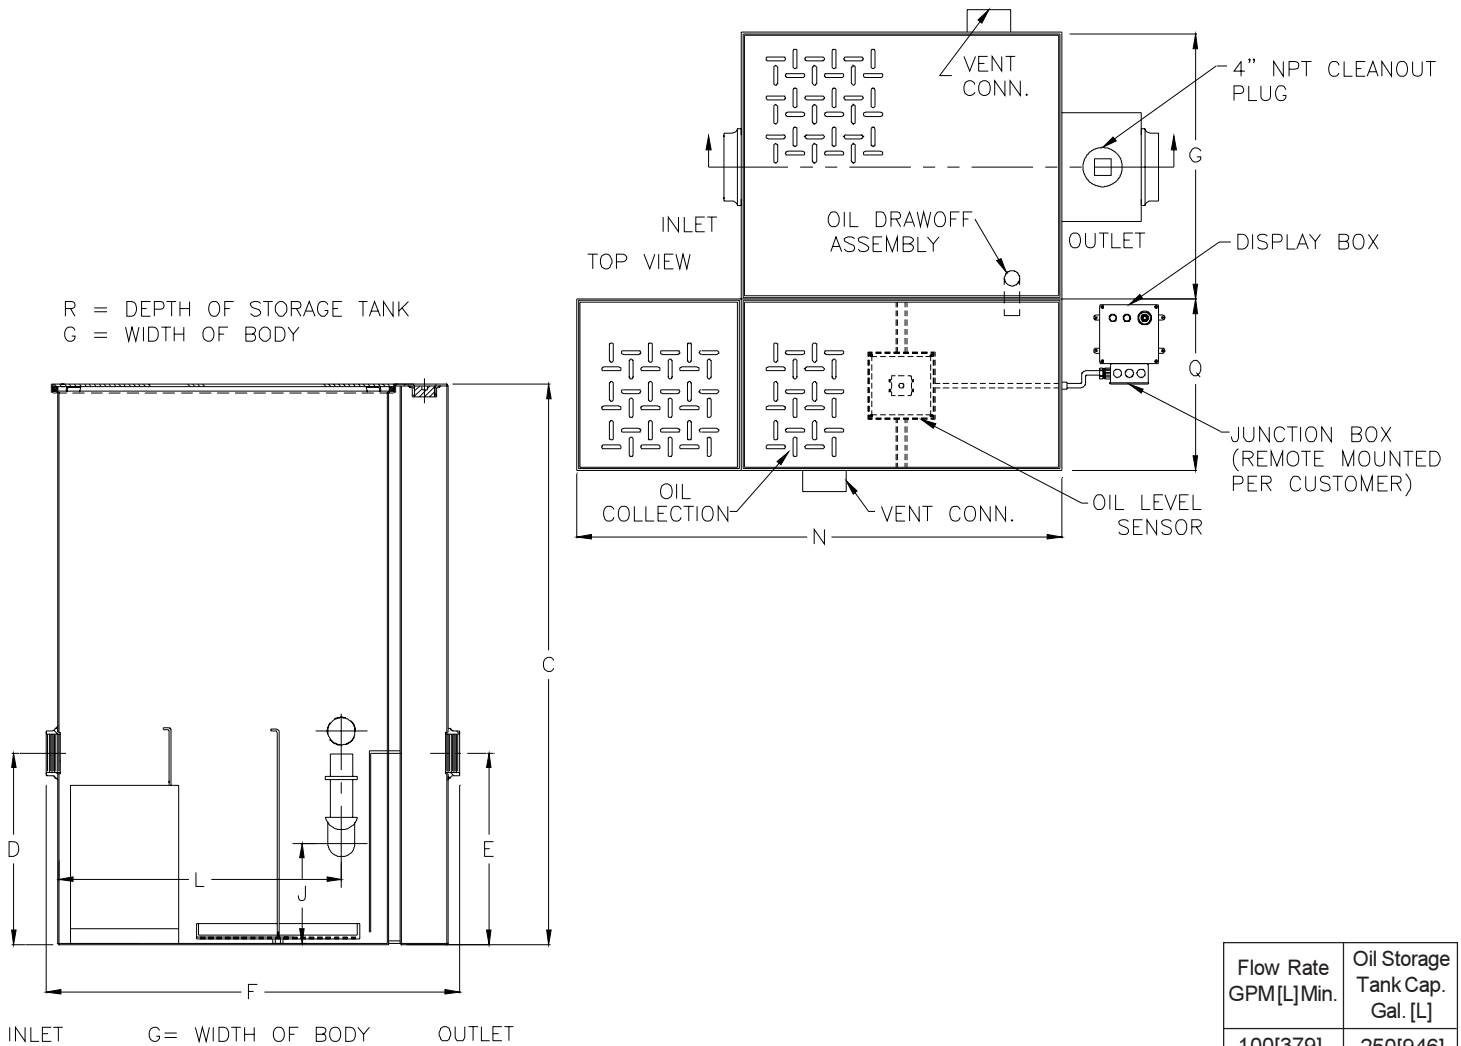

Flow Rate GPM[L]Min.	Oil Storage Tank Cap. Gal. [L]
100[379]	250[946]

Flow Rate GPM[L]Min	Inlet/Outlet Size	Water Capacity Gal. [L]	App. Wt. Lbs. [Kg]	No. of Covers	Dimensions In Inches									
					C	D/E	F	G	J	L	N	Q	R	
100[379]	3[75]	110[416]	2023[918]	3	63[1600]	23[584]	45 3/4[1162]	33 5/8[854]	10 [254]	30 1/8[765]	72[1828]	46[1168]	71 1/2[1816]	

ENGINEERING SPECIFICATION: ZURN Z1188-127 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, 4 [102] bronze cleanout plug, visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff, vent connections, 36 [915] integral extension, and secured gasketed non-skid cover. Complete with flow control fitting, integral storage tank, sensor box containing a float oil level sensor, and fiberglass display box with green power light, red oil level light, audible alarm, and junction box.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ **Z** Acid Resistant Coated Fabricated Steel*

SUFFIXES

_____ **-HD** Heavy-duty traffic cover rated at 10,000 lbs. maximum safe live load.

REV. A	DATE: 8/31/04	C.N. NO. 92511
DWG. NO. P-15073	PRODUCT NO. Z1188-127	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED