




Z1187-SI-76 SAND INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

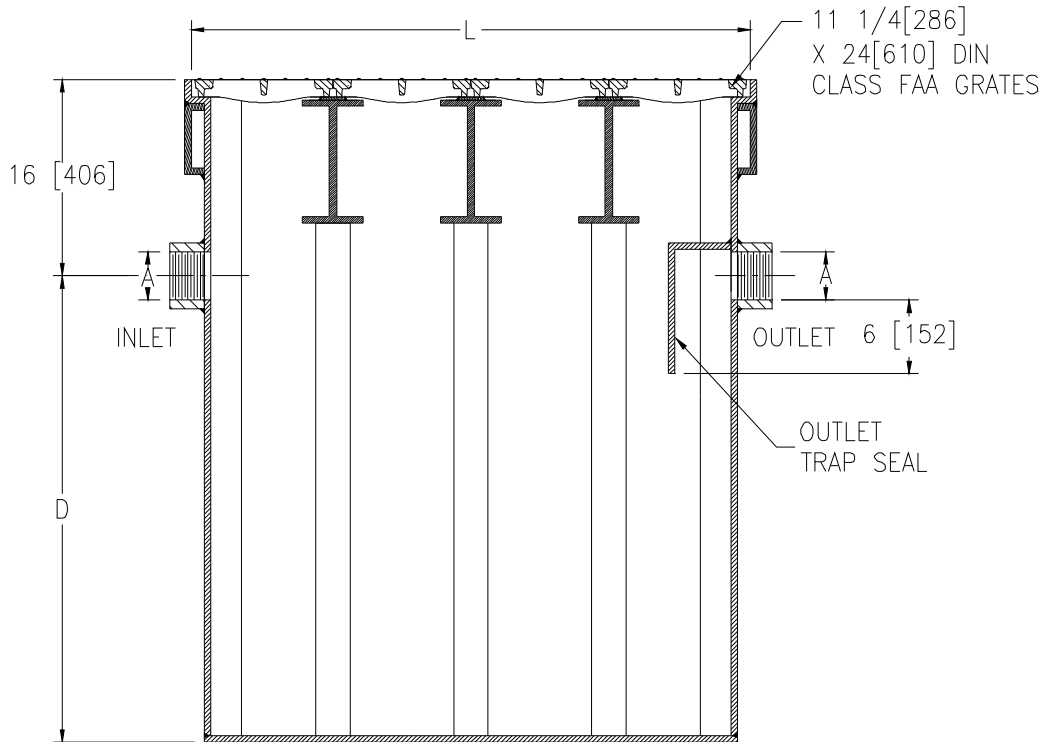

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	No. of 11 1/4 x 24 [288 x 610] Grates	Width
50	50 [189]	4 [102]	45 [1143]	26 [660]	120 [454]	4	24 [610]
150	150 [568]	4 [102]	45 [1143]	38 [965]	360 [1363]	8	48 [1219]

ENGINEERING SPECIFICATION: ZURN Z1187-SI-76 Acid Resistant Coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet, complete with removable heavy duty grates.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -E 6[152] Integral extension assembly for recessed installation
- ___ -NH No-Hub Inlet and Outlet (Specify Size)
- ___ -VP Vandal Proof Screws

REV. A	DATE: 11/29/05	C.N. NO. 94294
DWG. NO. P-14957 PRODUCT NO. Z1187-SI-76		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED