


## Z-1188-103 LARGE CAPACITY OIL INTERCEPTOR

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

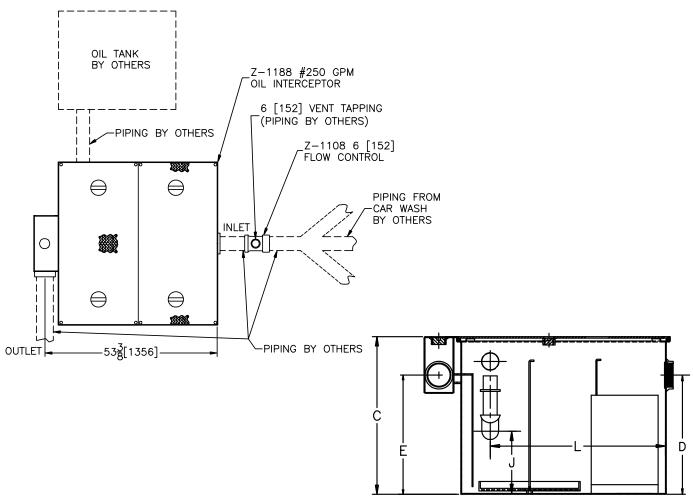

Flow Rate	Inlet/Outlet	Water Capacity	App. Wt.	No. of	Dimensions In Inches					
GPM[L]Min	Size**	Gal. [L]	Lbs. [Kg]	Covers	С	D/E	F	G	J	L
250 [946]	6 [150]	460 [1741]	1438 [625]	2	41 [1041]	36 [914]	71 [1803]]	51 3/8 [1305]	20 [508]	56 5/8 [1438]

**ENGINEERING SPECIFICATION**: ZURN Z-1188-103 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections either side. Secured gasketed non-skid cover complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

**OPTIONS** (Check/specify appropriate options)

PREFIXES Z-	Acid Resistant Coated Fabricated Steel*
SUFFIXES	
Е	Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
—— -HD —— -K	Heavy duty traffic cover rated at 10,000 lbs [4536] kg. maximum safe live load.  Anchor flange 1 3/4 [44] down from top and 2 [51] wide. No extension required to accomodate -K.
—— -кс	Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.

\*REGULARLYFURNISHEDUNLESSOTHERWISE SPECIFIED REV. A DATE: 9/18/96 C.N. NO. 75790

\*DWG. NO. P-14366 PRODUCT NO. Z-1188-103