


Z-1204-N4-B ADJUSTABLE VERTICAL BLOWOUT-No-Hub

T A G _____

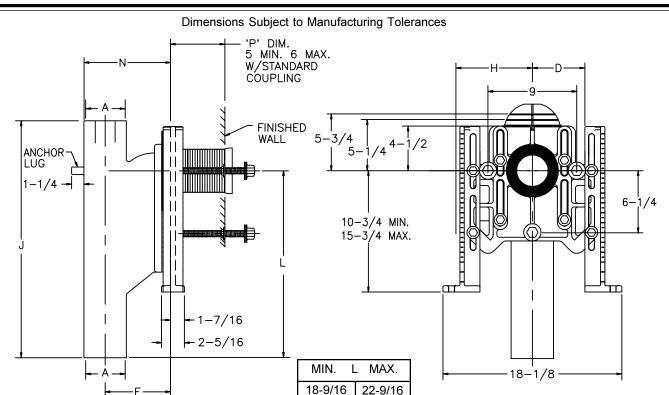

Note:

- 1. Min. 'P' Dim. Obtainable=2"
- Feet bolted to floor using min. 1/2 dia. bolts and back slots on carrier feet.
- 3. Back anchor feet required for secure installation.

Product	Dimensions In Inches					Approx.
No.	Α	D	E	Н	N	Wt. Lbs.
Z-1204-N4-B	4	5	6-5/8	5-1/2	8-13/16	67

PRODUCT/DEFINITION

-M

__ Z-1204-N4-B No-Hub Blowout Single Inlet, 2" Right Hand Vent.

PREFIXES

Z D.C.C.I. System with Zurn "ZZ" Adjustable Coupling
 D.C.C.I. System with NPT Face Plate, Non Adjustable Coupling

SUFFIXES

Auxiliary Support Assembly (For P-Dim. greater than 18") Blowout Type Fixture Support -B -BC **Back Cleanout** -CC Cast Iron Coupling 6" Long -CL Coupling Length Greater than 12" (Specify length if greater than 6") Floor Mounted Back Outlet, Fixture Support -G Galvanized Cast Iron -JJ 2" Auxiliary Inlet 2" Left Hand Auxiliary Inlet -JL 2" Right Hand Auxiliary Inlet -JR

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

Auxiliary Foot Support

(For P-Dim. 10"-18")

Threaded Stack Connection Left Hand Vent Connection

Vandal Proof Trim

ENGINEERING SPECIFICATION: ZURN

Seal" gasket.

-T

-VL

-VP

-W

-29

-45

Z-1204-N4-B Adjustable, vertical blowout water closet "Rigid

System" with () size No-Hub connections and () side inlets. Complete with Dura-Coated cast iron left hand fitting, with 2" vent, adjustable gasketed face plate, universal floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, trim and stud protectors. Rear anchor tie down and bonded "Neo-

Adapter for Womens Urinal

Mechanical Test Cap Assembly

(Previously Z-1210-29)
Finishing Frame for Siphon Jet System

(For Blowout System specify -45-B)

(Previously Z-1210-45)
Flush Valve Supply Support

-50 Flush Valve Supply Support for W.C. (Previously Z-1210-50)

_____ -61 "ZZ" Coupling Wrench

REV. B DATE: 11/3/94 C.N. NO. 70389

DWG. NO. 58493 PRODUCT NO. Z-1204-N4-B