


## **Z1188-ST-105** SIZE 200 LARGE CAPACITY HEAVY-DUTY OIL INTERCEPTOR W/287 GALLON INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

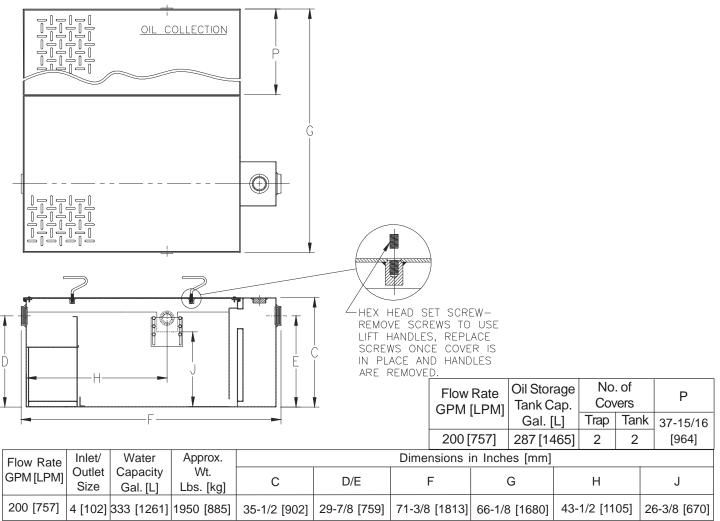

## ENGINEERING SPECIFICATION: ZURN Z1188-ST-105

Acid Resistant Coated interior and exterior Heavy-Duty fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, adjustable oil draw-off, vent connections, secured gasketed non-skid reinforced cover, complete with flow control fitting and left hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

**OPTIONS** (Check/specify appropriate options)

## PREFIXES

Z Acid Resistant Coated Fabricated Steel\*

## SUFFIXES

- -E Integral Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
  -K Anchor flange 1-3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.)
  -KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. A 3 [76] minimum extension height is required when anchor flange (-KC) option is specified. (Specify 'C' Dim. height required.)
- \_\_\_\_\_--STR Storage tank on right hand side when facing the inlet.

\* Regularly furnished unless otherwise specified.