




Z1187-88

SAND AND SEDIMENT INTERCEPTOR W/ 2125 GALLON [8044 L] CAPACITY

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

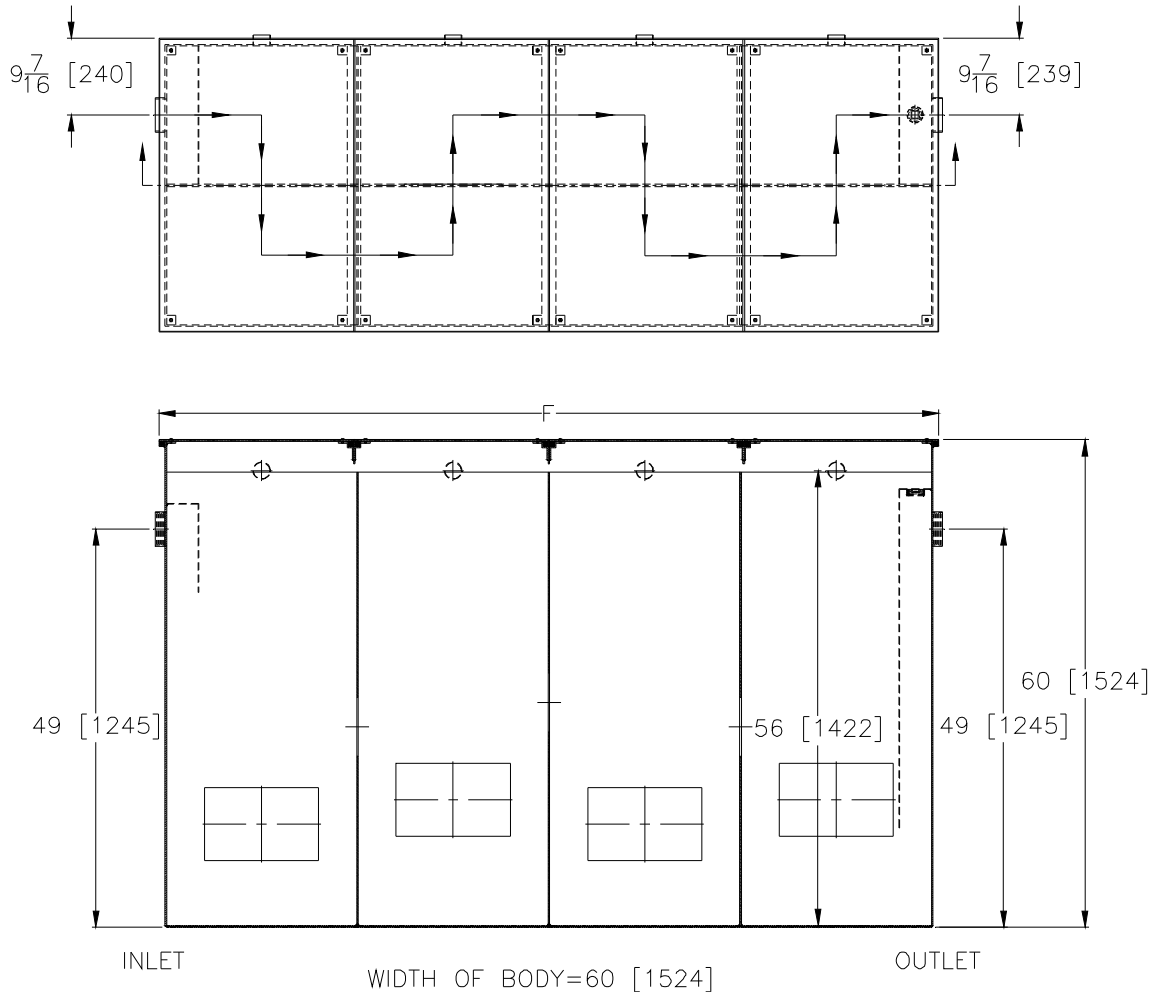

Cubic Ft. [m ³]	Approx. Wt.Lbs. [kg]	F
284 [8.0]	4540 [2059]	180 [4572]

ENGINEERING SPECIFICATION: ZURN Z1187-88
Acid Resistant Coated fabricated steel sand and sediment separator, 284 cu. ft. capacity below invert of outlet, 4 [102] threaded inlet and outlet, four 2 [51] threaded individual vent connections, complete with heavy-duty scoriated non-skid gasketed removable cover(s).

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -E Integral extension assembly for recessed installation (Specify overall height required)
- ___ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
No extension required to accommodate -K option.
- ___ -HD Extra heavy duty reinforced cover for vehicular traffic.
(Specify working load requirements)

REV. B	DATE: 1/7/10	C.N. NO. 110577
DWG. NO. P-15821		PRODUCT NO. Z1187-88

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED