




# Z1187-SI-116

## SIZE 100 SAND INTERCEPTOR

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

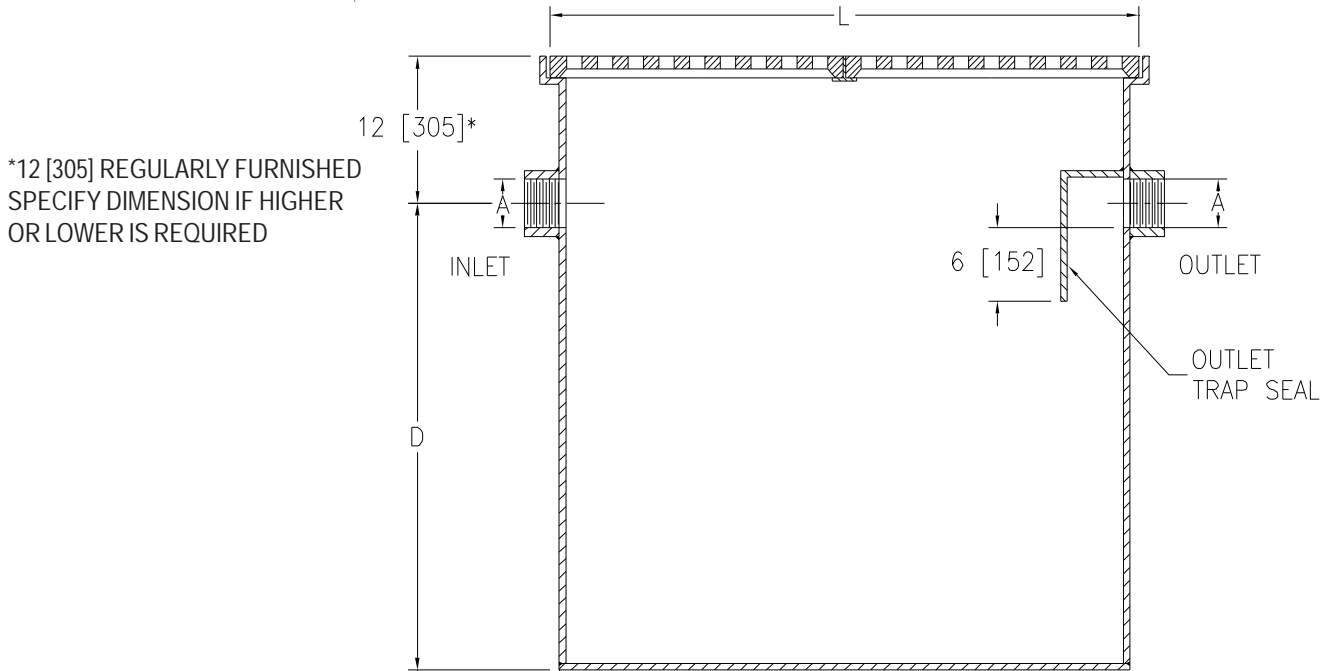

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	No. of 12 x 24 [305 x 610] Grates	Width	Approx. Wt. Lbs. [Kg]
100	100 [379]	4 [102]	48 [1219]	50 [1270]	240 [908]	4	24 [610]	320 [145]

### Engineering Specification: ZURNZ1187-SI-116

Size 100 Acid Resistant Coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet, complete with removable heavy-duty grates

**Options** (Check/specify appropriate options)

#### Prefixes

\_\_\_ Z Acid Resistant Coated Fabricated Steel\*

#### Suffixes

- \_\_\_ -E Integral Extension Assembly (Specify extension height)
- \_\_\_ -DG Duresist Grate
- \_\_\_ -K Anchor Flange 1-3/4 [44] down from top and 2 [51] wide. No extension required to accommodate -K option.
- \_\_\_ -KC Anchor Flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. No extension required to accommodate -KC option.
- \_\_\_ -NH No-Hub Inlet and Outlet (Z1040)
- \_\_\_ -SC Heavy-Duty Reinforced Cover(s) rated at 10,000 lbs. [4536 Kg.] maximum safe live load.
- \_\_\_ -VP Vandal-Proof Screws

\* Regularly furnished unless otherwise specified.