




Z1185-92 LINT INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

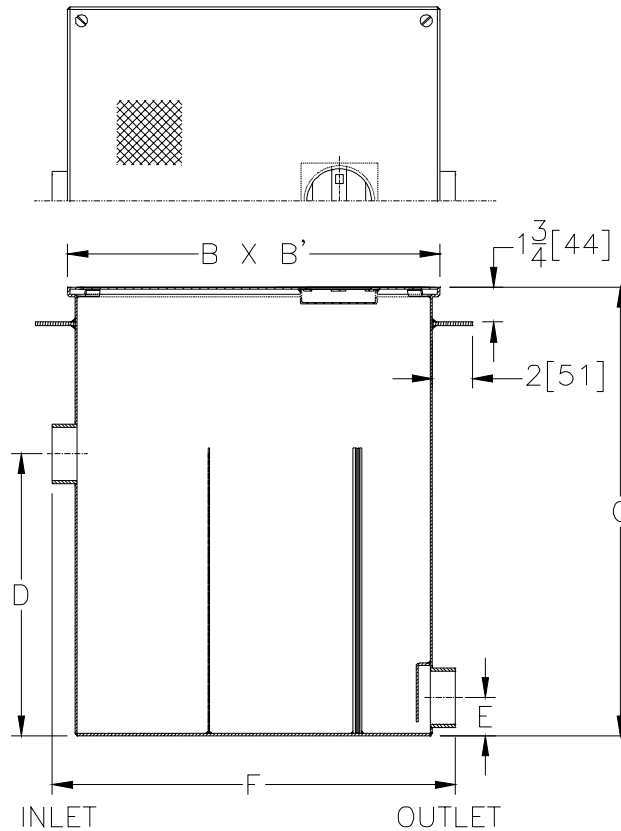

Size No. of Machines	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
7	4 [102]	70 [265]	170 [77]	25 [635]	25 [635]	25 [635]	17 [432]	4 [102]	26 3/8 [670]

ENGINEERING SPECIFICATION: ZURN Z1185-92 Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover with covered recessed lift handle, stainless lint intercepting secondary screen assembly and permanent primary straining baffle, anchor flange, built-in 5[127] extension, and 4[102] no-hub connections. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

_____ -RS Stainless Steel Screen Replacement Assembly

REV.	DATE: 7/15/03	C.N. NO. 91106
DWG. NO. P-14995 PRODUCT NO. Z1185-92		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED