


Z1185-117 LINT INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

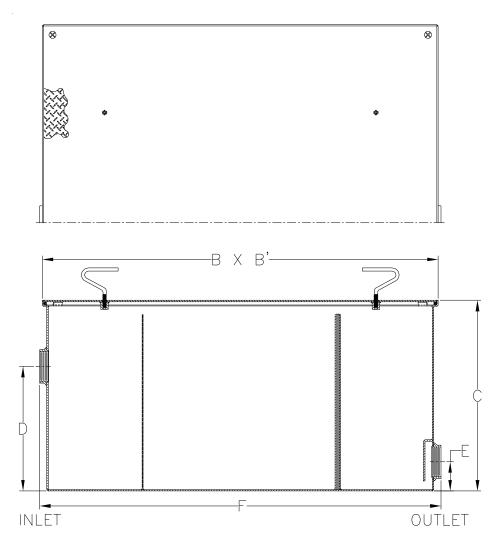

| Size No. of | Inlet/Outlet Size** | Flow Rate G.P.M. [L] | Approx. Wt. Lbs. [kg] | Dimensions In Inches | | | | | | | |
|----------------|------------------------|----------------------------|-----------------------------|----------------------|-----------|----------|----------|---------|-----------|--|--|
| Machines | | | | В | Β' | С | D | E | F | | |
| 18 | 4 [102] | 180 [681] | 404 [183] | 54 [1372] | 54 [1372] | 26 [660] | 17 [432] | 4 [102] | 55 [1397] | | |

ENGINEERING SPECIFICATION: ZURN Z1185-117 Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

-RS Stainless Steel Screen Replacement Assembly

| | REV. | DATE: | 3/12/09 | C.N. NO. 99788 |
|---|----------|---------|---------|----------------|
| *REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED | DWG. NO. | P-15674 | PRODUCT | ۲NO. Z1185-117 |