




Z415J-75

BODY ASSEMBLY W/ "TYPE J" STRAINER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

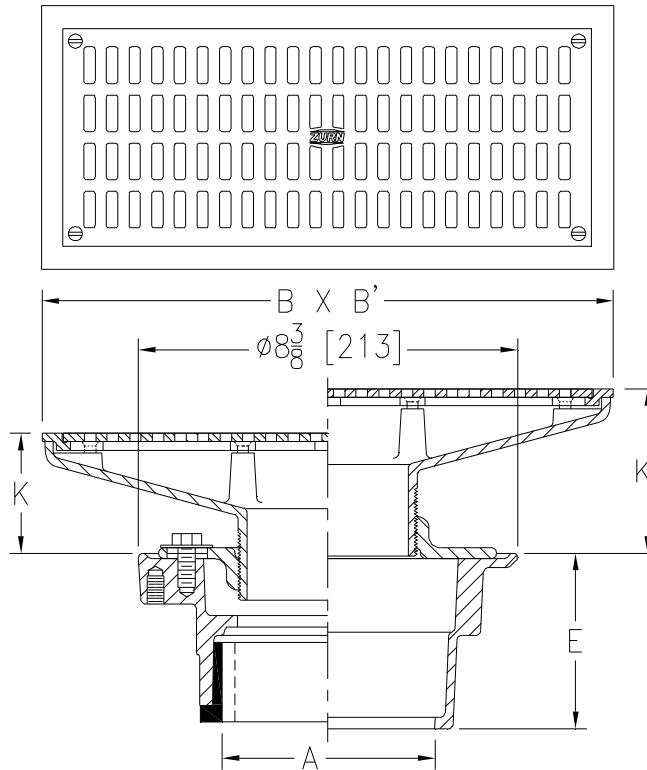

Dimensions In Inches						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm ²]
A - Pipe Size	B x B' Strainer Size	K		K'			
		Min.	Max.	Min.	Max.		
3-4 [76-102]	5 1/2 x 13 [140 x 330]	2 [51]	3 1/8 [79]	2 7/8 [73]	4 [102]	18 [8]	17 [110]

ENGINEERING SPECIFICATION: ZURN Z415J-75 Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and "TYPE J" polished, stainless steel rectangular strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2 thru 4 [51 thru 102]
- 2 [51]
- 3 [76]
- 4 [102]
- 6 [152]
- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

'E' BODY HT. DIM.

- 3 7/8 [98]
- 2 3/8 [60]
- 2 5/8 [67]
- 2 7/8 [73]
- 2 3/4 [70]
- 3 7/8 [98]
- 3 3/4 [95]

PREFIXES

- _____ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
- _____ ZS D.C.C.I. Body Assembly w/ Polished Type 304 (CF8) Stainless Steel Top*

SUFFIXES

- | | |
|---|---|
| <ul style="list-style-type: none"> _____ -AR Acid Resisting Epoxy Coated Cast Iron _____ -G Galvanized Cast Iron _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19]) _____ -SR Stabilizer Ring _____ -TC Neo-Loc Test Cap Gasket
(2 - 4 [51 - 76] NL Bottom Outlet Only) _____ -U 1 - 3 [25 - 76] High Extension Adapter | <ul style="list-style-type: none"> _____ -V Backwater Valve _____ -VP Vandal-Proof Secured Top _____ -Y Sediment Bucket _____ -18 Leveling Ring (See Z400-18) _____ -90 90° Threaded Side Outlet Body Assembly (2 [51], 3 [76] Only) |
|---|---|

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 1/9/07	C.N. NO. 97939
DWG. NO. P-15506 PRODUCT NO. Z415J-75		