




Z1189-91

OIL/SEDIMENT INTERCEPTOR WITH HEAVY-DUTY VANDAL-PROOF GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

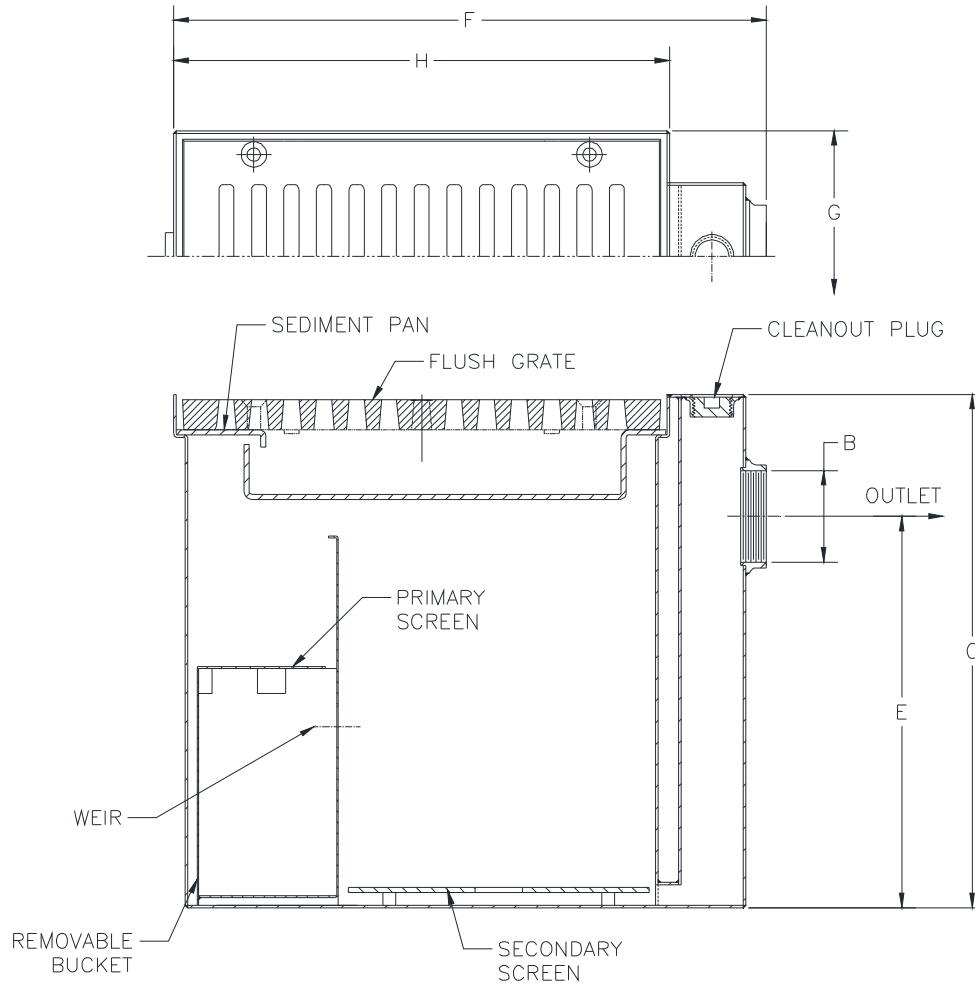

Size	Sludge Capacity Lbs. [kg]	Grate Open Area Sq. In. [cm ²]	No. of Grates	No. of Pans	Approx. Wt. Lbs [kg]	Dimensions in Inches [mm]					
						'B' Pipe Size	C	E	F	G	H
12	12 [5]	49 [316]	1	1	70 [32]	2 [51]	15 [381]	10-1/2 [267]	17-1/8 [435]	11-3/8 [289]	12-3/8 [314]

ENGINEERING SPECIFICATION: ZURN Z1189-91

Acid Resistant Coated interior and exterior fabricated steel oil/sediment interceptor, bronze cleanout plug and visible double wall trap seal, removable sediment bucket, horizontal baffle, internal vent connection, with Dura-Coated heavy-duty vandal-proof cast iron grate.

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -DG Duresist Grate
- ___ -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required)
- ___ -K Anchor flange 1-3/4 [44] down from top and 2 [51] wide.
- ___ -KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with seepage holes and clamp collar.

* Regularly furnished unless otherwise specified.