




Z-1186-98

OIL INTERCEPTOR WITH INTEGRAL STORAGE TANK

Dimensional Data (inches or [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

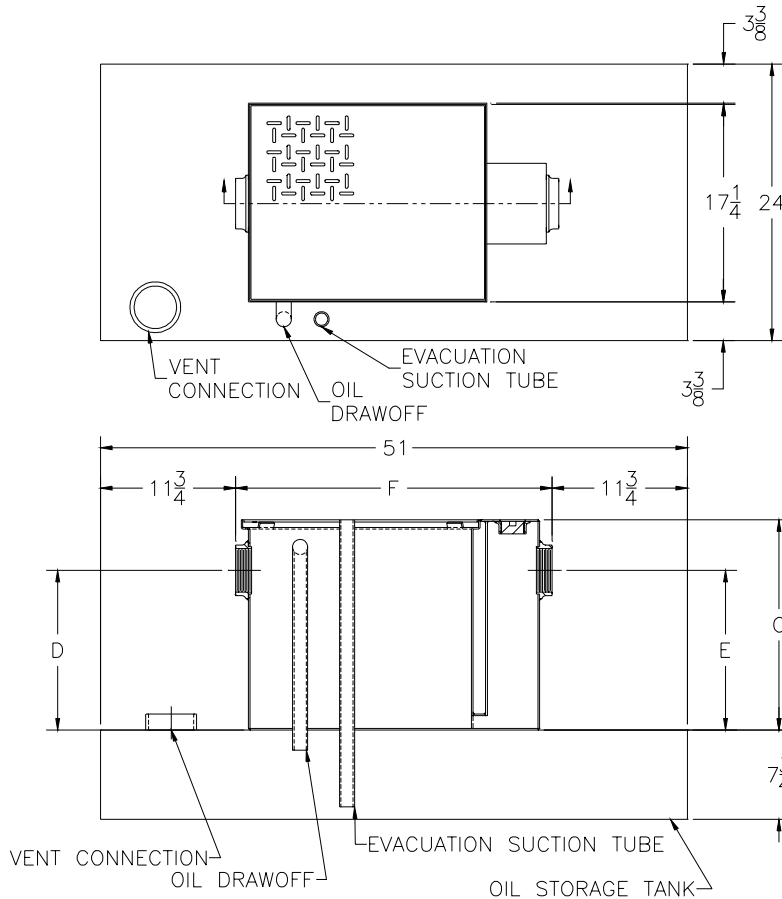

Size	Inlet/Outlet Size**	Flow Rate G.P.M.	Storage Tank Cap. Gal.	Approx. Wt. Lbs.	Dimensions In Inches			
					C	D	E	F
600	3	25	22	190	15	11 3/4	11 3/4	27 1/2

ENGINEERING SPECIFICATION: ZURN Z-1186-98 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ **Z-** Acid Resistant Coated Fabricated Steel*

SUFFIXES

- _____ **-E** Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- _____ **-K** Anchor flange 1-3/4" down from top and 2" wide. A 3" minimum extension height required when anchor flange (-K) option is specified.
- _____ **-KC** Anchor flange 1-3/4" down from top and 2" wide with clamp collar.

** Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. Size #600 will have connections reduced to 3" as standard. If changed, flow control and air relief by-pass must be adjusted accordingly.

REV.	DATE: 7/25/95	C.N. NO. 72557
DWG. NO. P-14208 PRODUCT NO. Z-1186-98		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED