




# Z1170-164

## ADJUSTABLE RECESSING RECEIVER FOR GREASE INTERCEPTOR W/ IN LINE CLOSURE VALVE

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

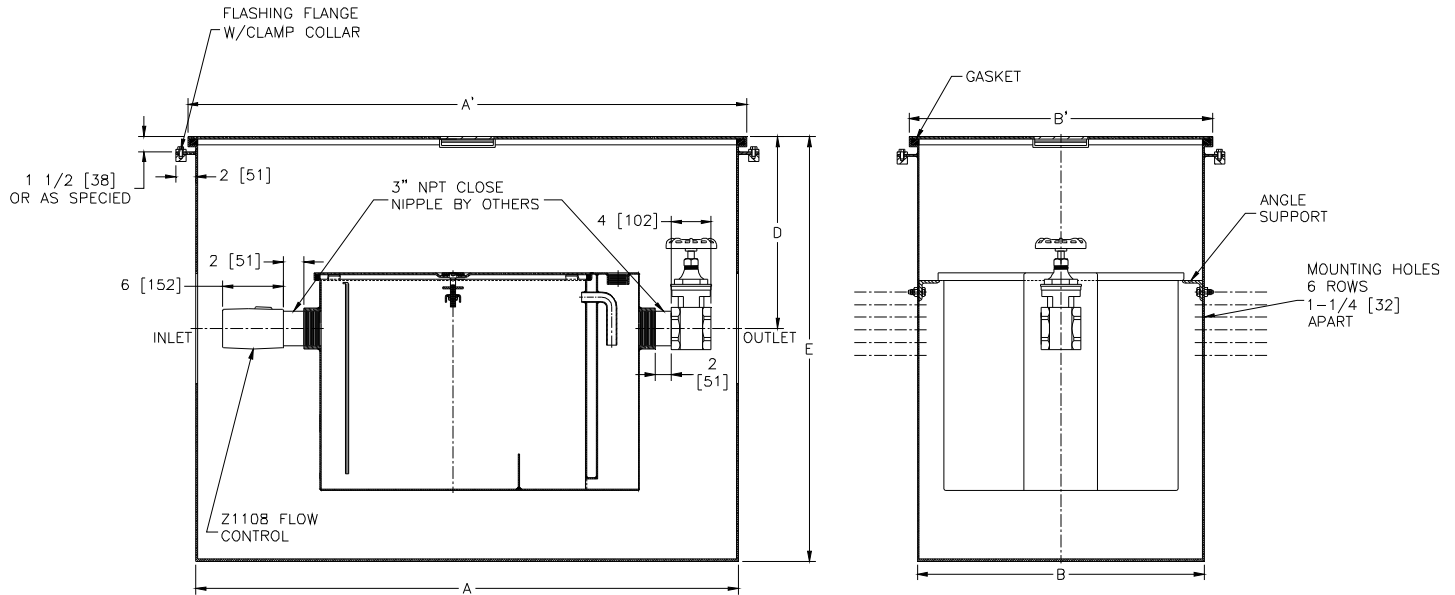

| Size      | Dimensions in Inches [mm] |               |          |          |          |           |
|-----------|---------------------------|---------------|----------|----------|----------|-----------|
|           | A                         | A'            | B        | B'       | D        | E         |
| 300 & 700 | 53-1/4 [1403]             | 55-1/4 [1403] | 28 [711] | 30 [762] | 19 [483] | 42 [1087] |

### ENGINEERING SPECIFICATION: ZURN Z1170-164

Acid Resistant Epoxy Coated Recessing receiver, enclosed type, equipped with adjustable support brackets, anchor flange with clamp collar and gasketed non-skid cover with recessed covered lift handle. Complete with Z1170 Grease Interceptor and Z1108 flow control fitting. For Grease Interceptor specifications see Z1170 drawing.

### PREFIXES

\_\_\_ Z Acid Resistant Coated Fabricated Steel\*

### SUFFIXES

\_\_\_ T Cover recessed for tile/terrazzo. A 3 [76] minimum extension height is required. (Specify 'C' Dim. and required recess depth - 1/8 [3], 3/4 [19], or 1 1/4 [32])

\* Regularly furnished unless otherwise specified.