




Z1188-134

OIL INTERCEPTOR W/ INTEGRAL OIL STORAGE TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches or [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

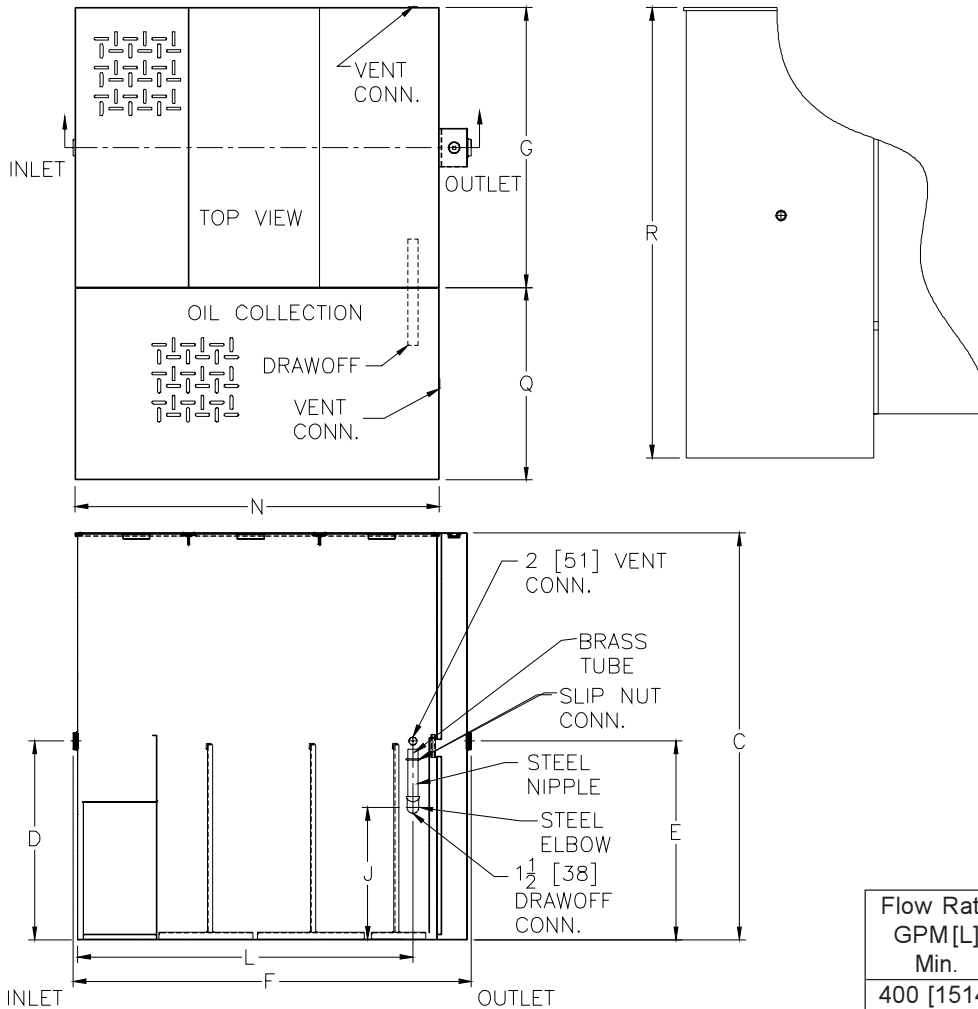

Flow Rate GPM [L] Min.	Oil Storage Tank Cap. Gal. [L]	No. of Covers	
		Trap	Tank
400 [1514]	500 [1893]	3	1

Flow Rate GPM [L] Min.	Inlet/ Outlet Size**	Water Capacity Gal. [L]	App. Wt. Lbs. [Kg]	Dimensions In Inches									
				C	D/E	F	G	J	L	N	Q	R	
400 [1514]	6 [152]	1090 [4126]	5076 [2302]	97 1/4 [2470]	47 5/8 [1210]	94 [2388]	67 [1702]	20 1/2 [521]	79 1/8 [2010]	85 1/2 [2171]	46 [1168]	107 3/4 [2723]	

ENGINEERING SPECIFICATION: ZURN Z1188-134 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections. Secured gasketed non-skid cover complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -HD Heavy-duty traffic cover rated at 10,000 lbs [4536] kg. maximum safe live load.
- ___ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide. No extension required to accomodate -K.
- ___ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 6/23/05	C.N. NO. 93566
DWG. NO. P-15172	PRODUCT NO. Z1188-134	