




Z-101-77
20 [508] DIAMETER MAIN ROOF DRAIN
LOW SILHOUETTE DOME

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

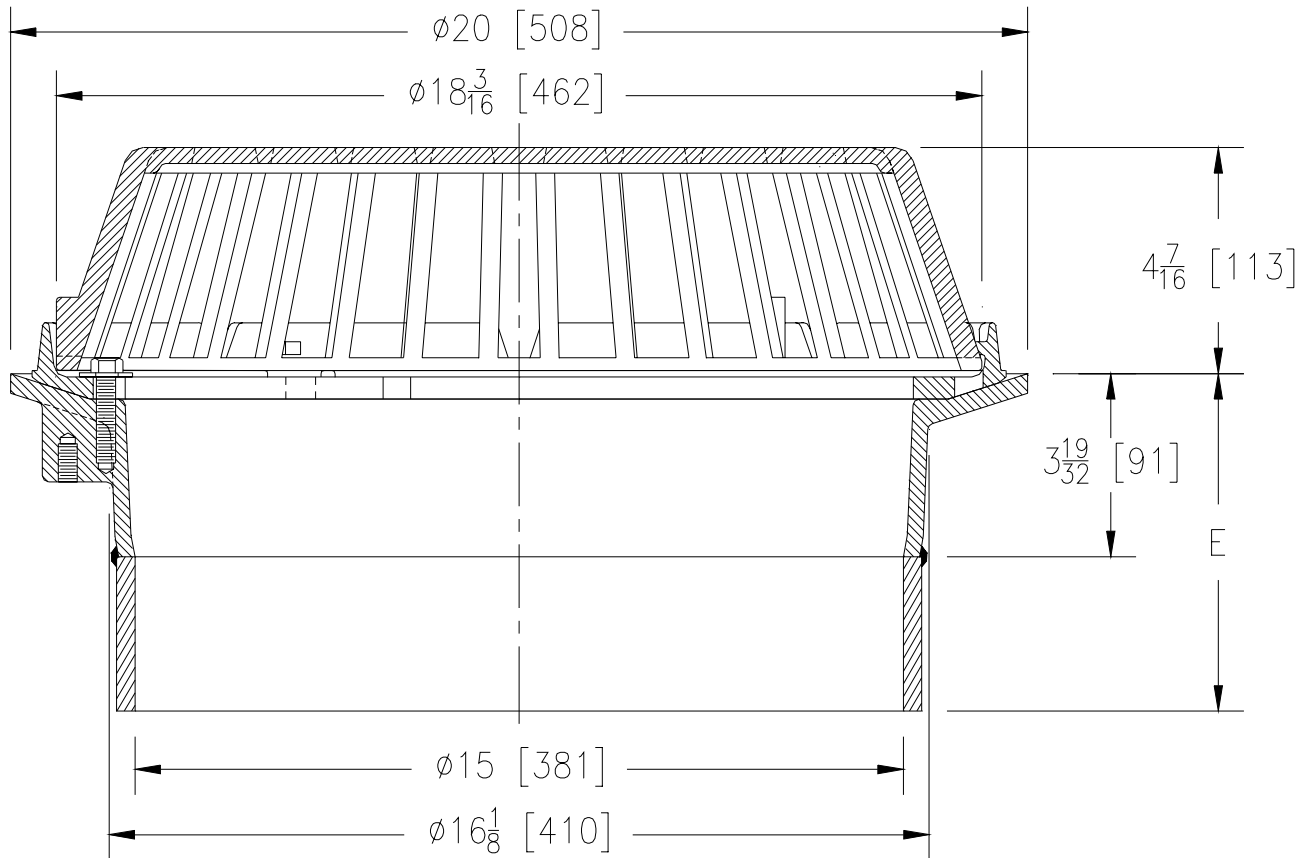

Pipe Size In.	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm ²]
15 [381]	79 [36]	216 [1394]

ENGINEERING SPECIFICATION: ZURN Z-101-77 20 [508] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard and low silhouette dome.

PIPE SIZE (Specify size/type) **OUTLET** **E BODY HT. DIM.**
 15 [381] _____ NH No-Hub 6-5/8 [168]

PREFIXES
 _____ Z- D.C.C.I. Body with Cast Iron Dome*

SUFFIXES
 _____ -C Underdeck Clamp
 _____ -E Static Extension 2 [51] thru 4 [102] (Specify Height)
 _____ -G Galvanized Cast Iron
 _____ -R Roof Sump Receiver
 _____ -W2 2 [51] Internal Water Dam
 _____ -W3 3 [76] Internal Water Dam
 _____ -W4 4 [102] Internal Water Dam
 _____ -89 2 [51] High External Water Dam

REV.	DATE: 1/21/02	C.N. NO. 88273
DWG. NO. P-14865 PRODUCT NO. Z-101-77		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED