


## Z1186-126 SIZE #300 OIL INTERCEPTOR W/ 4[102] INLET, OUTLET AND INTEGRAL EXTENSION

**SPECIFICATION SHEET** 

TAG

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

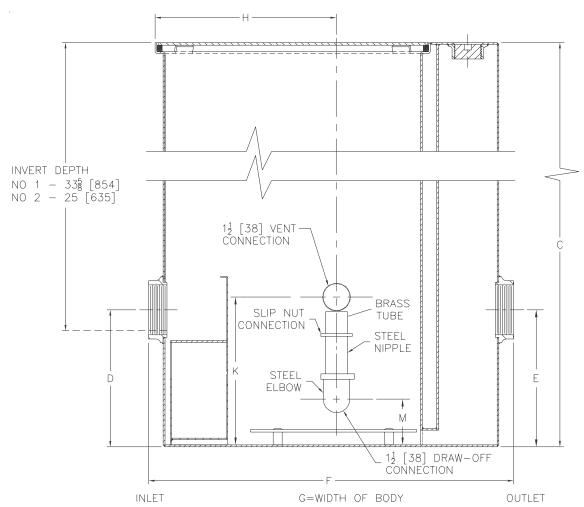

No	Size	Inlet/ Outlet Size	Flow Rate GPM [L]	Cap.	Wt.Lbs.	Dimensions In Inches						
						С	D/E	F	G	Н	К	М
1	300	4 [102]	10 [38]	7 [26]	140 [64]	40 3/4 [1035]	9 1/8 [232]	25 1/8 [638]	14 [356]	11 5/8 [295]	11 [279]	2 3/4 [70]
2	300	4 [102]	10 [38]	7 [26]	125 [57]	32 1/8 [816]	9 1/8 [232]	25 1/8 [638]	14 [356]	11 5/8 [295]	11 [279]	2 3/4 [70]

**ENGINEERING SPECIFICATION**: ZURN Z1186-126 Acid Resistant Coated interior and exterior fabricated steel oil interceptor with integral extension, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil draw-off and vent connections either side, secured gasketed non-skid cover, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

Note: Location of outlet from bottom of interceptor cannot be changed.

**OPTIONS** (Check/specify appropriate options)

## **PREFIXES**

Z Acid Resistant Coated Fabricated Steel\*

## SUFFIXES

- \_\_\_\_ -HD Heavy duty traffic cover rated at 10,000 lbs. [4536 kg.] maximum safe live load.
  - \_\_\_\_ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- \_\_\_\_\_ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.

REV.	DATE: 04/11/0	7 C.N. NO.	96456
DWG. NO.	P-15404	PRODUCTNO	. Z1186-126

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED