


## Z-1173-83 LOW PROFILE GREASE INTERCEPTOR WITH ACCUMULATING CONE & FLOW CONTROL TEE

TAG \_\_\_\_\_

Dimensions Subject to Manufacturing Tolerances

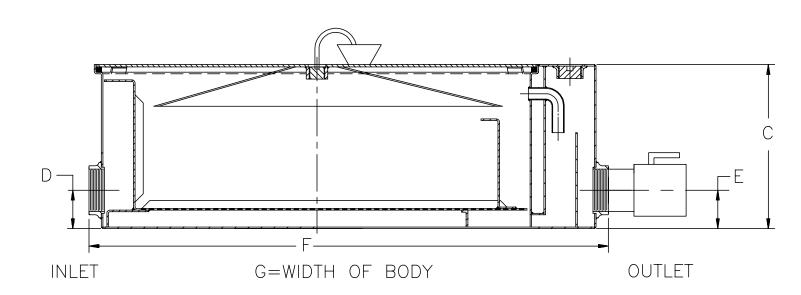

Size	Inlet/Outlet	Flow Rate	Сар	pacity Approx. Wt.		Dimensions In Inches				
	Size**	G.P.M.	Water Gal.	Grease Lbs.	Lbs.	C	D	E	F	G
500		20	15	40	102	10	3-1/8	3-1/8	31	21-1/8
700	3**	35	30	70	172	10-3/4	3-1/8	3-1/8	42-1/8	29-3/8
800		50	45	100	210	16	10	10	49-1/2	27-3/4

**ENGINEERING SPECIFICATION**: ZURN Z-1173-83 Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, rated at \_\_\_\_ GPM and \_\_\_ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray. Gasketed non-skid secured cover with enzyme port having bronze plug, grease accumulating cone, flow control tee (Z-1108) and in line closure valve. Regularly furnished with 3" low inlet and outlet.\*\*

**OPTIONS** (Check/specify appropriate options)

## **PREFIXES**

Z- Acid Resistant Coated Fabricated Steel\*

## **SUFFIXES**

**L** Angle type (Z-1108-L) flow control device.

REV. DATE: 6/17/93 C.N. NO. 69080 DWG. NO. P-13829 PRODUCT NO. Z-1173-83

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED