




Z1187-SI-K

SAND INTERCEPTOR W/ ANCHOR FLANGE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

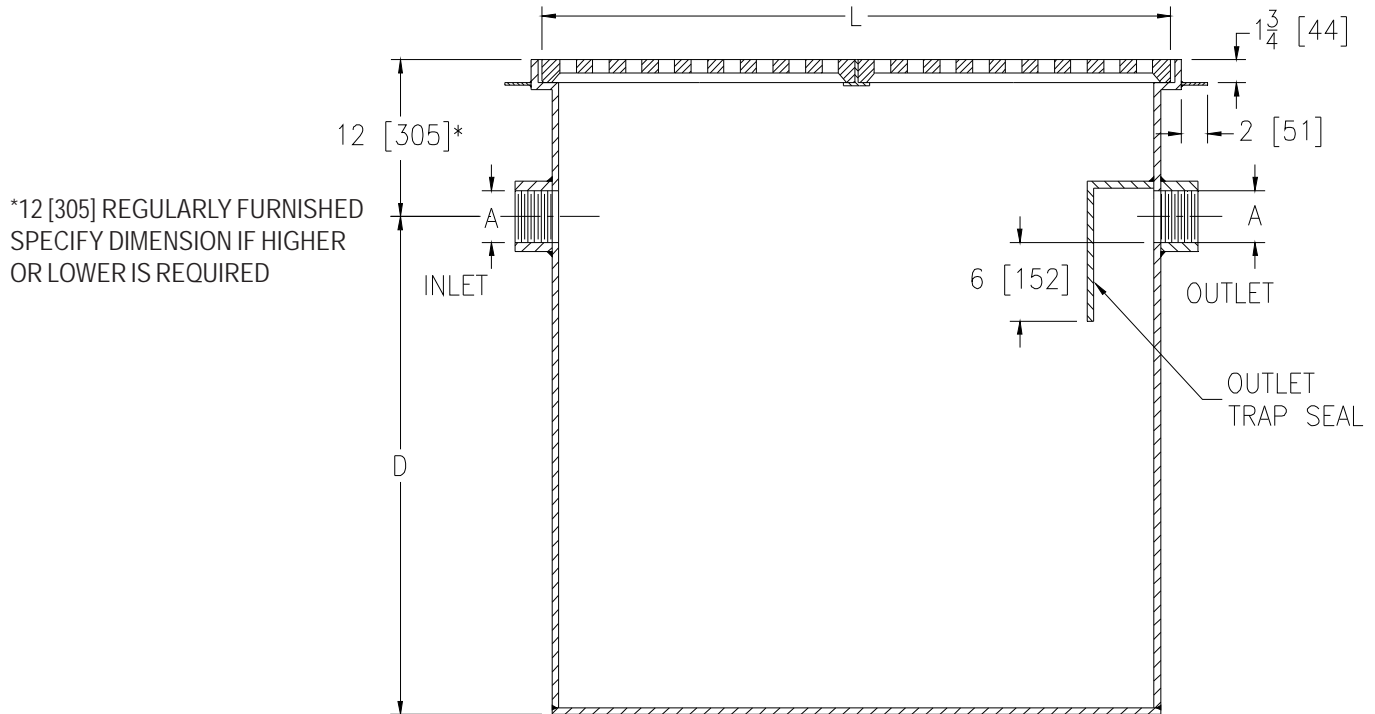

*12 [305] REGULARLY FURNISHED
SPECIFY DIMENSION IF HIGHER
OR LOWER IS REQUIRED

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	No. of 12 x 24 [305 x 610] Grates	Width	Approx. Wt. Lbs. [Kg.]
20	20 [76]	4 [102]	24 [610]	26 [660]	60 [227]	2	24 [610]	135 [61]
50	50 [189]	4 [102]	48 [1219]	26 [660]	120 [454]	4	24 [610]	206 [93]
150	150 [568]	4 [102]	48 [1219]	38 [965]	360 [1363]	8	48 [1219]	370 [168]
250	250 [946]	6 [152]	72 [1829]	39 [991]	540 [2044]	12	48 [1219]	1296 [588]
500	500 [1893]	6 [152]	120 [3058]	51 [1295]	1200 [4542]	20	48 [1219]	2206 [1001]

ENGINEERING SPECIFICATION: ZURN Z1187-SI-K

Acid Resistant Coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet and anchor flange, complete with removable heavy-duty grates.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -E Integral Extension Assembly (Specify extension height)
- ___ -DG Duresist Grate
- ___ -NH No-Hub Inlet and Outlet (Z1040)
- ___ -SC Heavy-Duty Reinforced Cover(s) rated at 10,000 lbs. [4536 Kg.] maximum safe live load.
- ___ -VP Vandal-Proof Screws

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. -	DATE: 5/20/11	C.N. NO. 121318
DWG. NO. 300915	PRODUCT NO. Z1187-SI-K	