




**Z-100-150**  
**15" [381] DIAMETER MAIN ROOF DRAIN**  
**WITH PERFORATED GRAVEL GUARD**

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

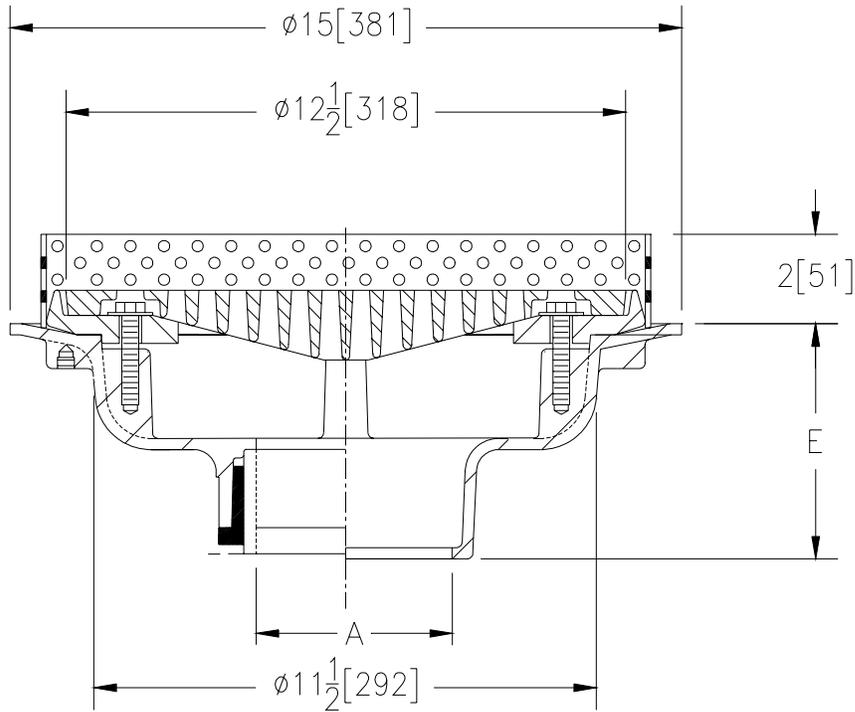

A- Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
2-3-4 [50-75-100]	28 [13]	30 [195]
5-6 [125-150]	29 [13]	
8 [200]	30 [14]	
10 [250]	32 [14]	

**ENGINEERING SPECIFICATION:** ZURN Z-100-150 15 [381] Diameter roof drain. Dura-Coated cast iron body, clamping collar with integral gravel guard, 2 [51] high perforated ring and flush grate.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

- 2 thru 6, 8, 10 [50 thru 150, 200, 250]
- 2 thru 6, 8, 10 [50 thru 150, 200, 250]
- 2 thru 6, 8, 10 [50 thru 150, 200, 250]
- 2, 3, 4 [50, 75, 100]

(Specify size/type) **OUTLET**

- \_\_\_\_\_ IC Inside Caulk
- \_\_\_\_\_ IP Threaded
- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ NL Neo-Loc

**E BODY HT. DIM.**

- 5 1/4 [133]
- 3 3/4 [95]
- 5 1/4 [133]
- 4 5/8 [117]

**PREFIXES**

- \_\_\_\_\_ Z- D.C.C.I. Body and Grate

**SUFFIXES**

- \_\_\_\_\_ -AC Angular Underdeck Clamp
- \_\_\_\_\_ -AR Acid Resistant Epoxy Coated Finish
- \_\_\_\_\_ -C Underdeck Clamp
- \_\_\_\_\_ -DX Dex-o-tex Flange
- \_\_\_\_\_ -G Galvanized Cast Iron
- \_\_\_\_\_ -R Roof Sump Receiver
- \_\_\_\_\_ -VP Vandal Proof Secured Top
- \_\_\_\_\_ -XJ Vertical Expansion Joint (See Z-190)
- \_\_\_\_\_ -90 90° Threaded Side Outlet Body

<b>REV.</b>	<b>DATE: 1/12/98</b>	<b>C.N. NO. 79519</b>
<b>DWG. NO. P-14587 PRODUCT NO. Z-100-150</b>		