
TAG		

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

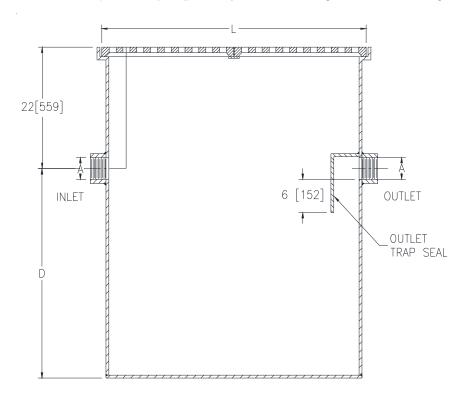

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	No. of 12 x 24 [305 x 610] Grates	Width	Approx. Wt. Lbs. [Kg]
20	20 [76]	4 [102]	24 [610]	26 [660]	60 [227]	2	24 [610]	133 [60]

ENGINEERING SPECIFICATION: ZURN Z1187-SI-119

Acid Resistant Coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet, complete with removable heavy-duty grates and custom integral extension.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

S

UFFIXES	
E	Integral Extension Assembly (Specify extension height)
DG	Duresist Grate Duresist Grate
K	Anchor Flange 1-3/4 [44] down from top and 2 [51] wide. No extension required to accommodate -K option.
KC	Anchor Flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. No extension required to
	accommodate -KC option.
NH	No-Hub Inlet and Outlet (Z1040)
SC	Heavy-Duty Reinforced Cover(s) rated at 10,000 lbs. [4536 Kg.] maximum safe live load.
-VP	Vandal-Proof Screws

Prod. | Dwg. No. Z1187-SI-119

^{*} Regularly furnished unless otherwise specified.