
Z1171-82

SPECIFICATION SHEET

LOW PROFILE GREASE INTERCEPTOR
W/ BACTERIA DOSING UNIT AND ACCESS COVER

TAG ____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

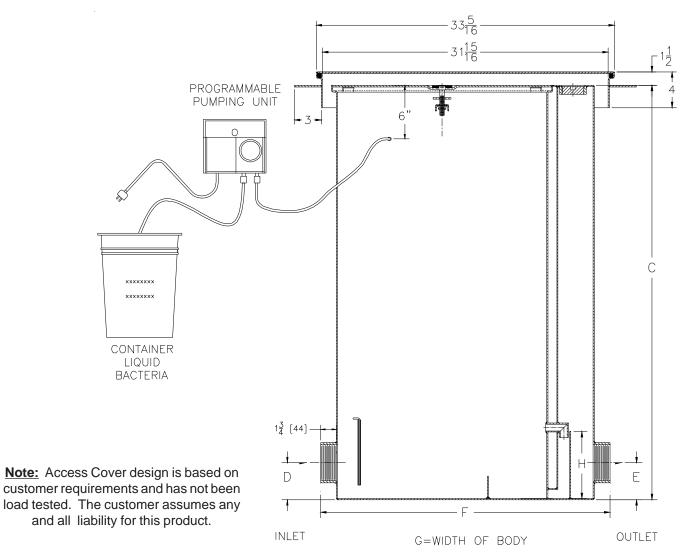

Г	Size	Inlet/ Outlet	Flow Rate Capa		acity	Approx.	Dimensions in Inches				
			G.P.M.	Water	Grease	Wt. Lbs.					
		Size*	[L]	Gal. [L]	Lbs. [kg]	[kg]	С	D/E	F	G	н
	700	4* [102]	35 [132]	30 [113]	70 [32]	210 [95]	46 1/4 [1175]	4 1/8 [105]	42 1/8 [1070]	29 3/8 [746]	7[178]

ENGINEERING SPECIFICATION: ZURN Z1171-82 Acid Resistant Epoxy Coated interior and exterior fabricated steel grease interceptor with automatic bacteria dosing unit. Rated at 35 GPM and 70 lbs. grease capacity, with internal air relief bypass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing inlet baffle and fixed bottom outlet baffle. Gasketed non-skid secured cover with center tie-down assembly, complete with Z1108 flow control fitting, and access cover. Furnished with 110 VAC pump, pump mounting hardware, 15 feet of poly tubing and 5 gallons of grease eating bacteria.

PREFIXES

Z- Acid Resistant Coated Fabricated Steel*

REV. C DATE: 10/25/10 C.N. NO. 111971

DWG. NO. 300397 PRODUCT NO. Z1171-82