




# Z1185-158

## LINT INTERCEPTOR SIZE 20 WITH 6 [152] INLET/OUTLET

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

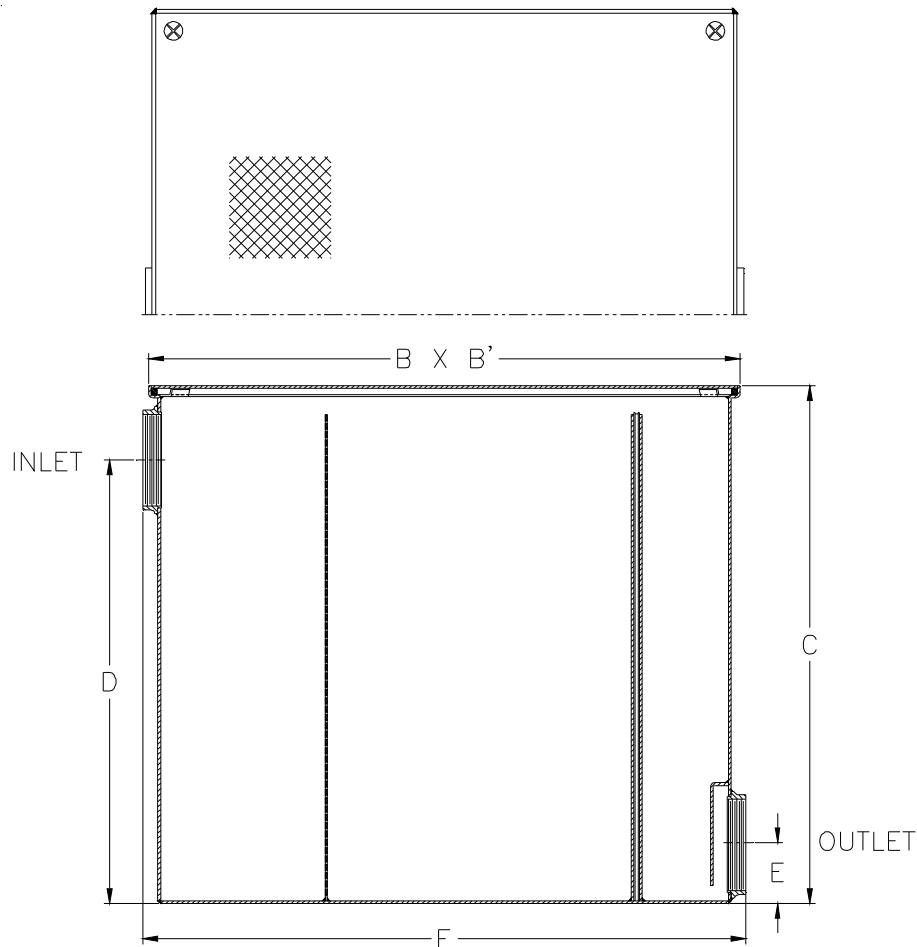

Size - No. of Machines	Inlet/Outlet Size	Flow Rate GPM [L]	Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]					
				B	B'	C	D	E	F
20	6 [152]	200 [757]	404 [183]	40 [1016]	40 [1016]	35 [889]	30 [762]	5 [127]	41 [1041]

### ENGINEERING SPECIFICATION: ZURN Z1185-158

Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, aluminum lint intercepting secondary screen assembly, and permanent primary straining baffle with 3/8" [10 mm] diameter perforated holes. Regularly furnished with high inlet and low outlet.

**OPTIONS** (Check/specify appropriate options)

#### PREFIXES

\_\_\_ Z Acid Resistant Coated Fabricated Steel\*

#### SUFFIXES

\_\_\_ -E Acid Resistant Coated interior and exterior fabricated steel extension section (Specify 'C' dimension required for recessed installation).

\_\_\_ -RS Stainless Steel Screen Replacement Assembly

\* Regularly furnished unless otherwise specified.