




# Z1187-SI-161

STAINLESS STEEL SAND INTERCEPTOR WITH INTEGRAL EXTENSION, SOLID COVERS, AND ANCHOR FLANGE W/ CLAMP COLLAR

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

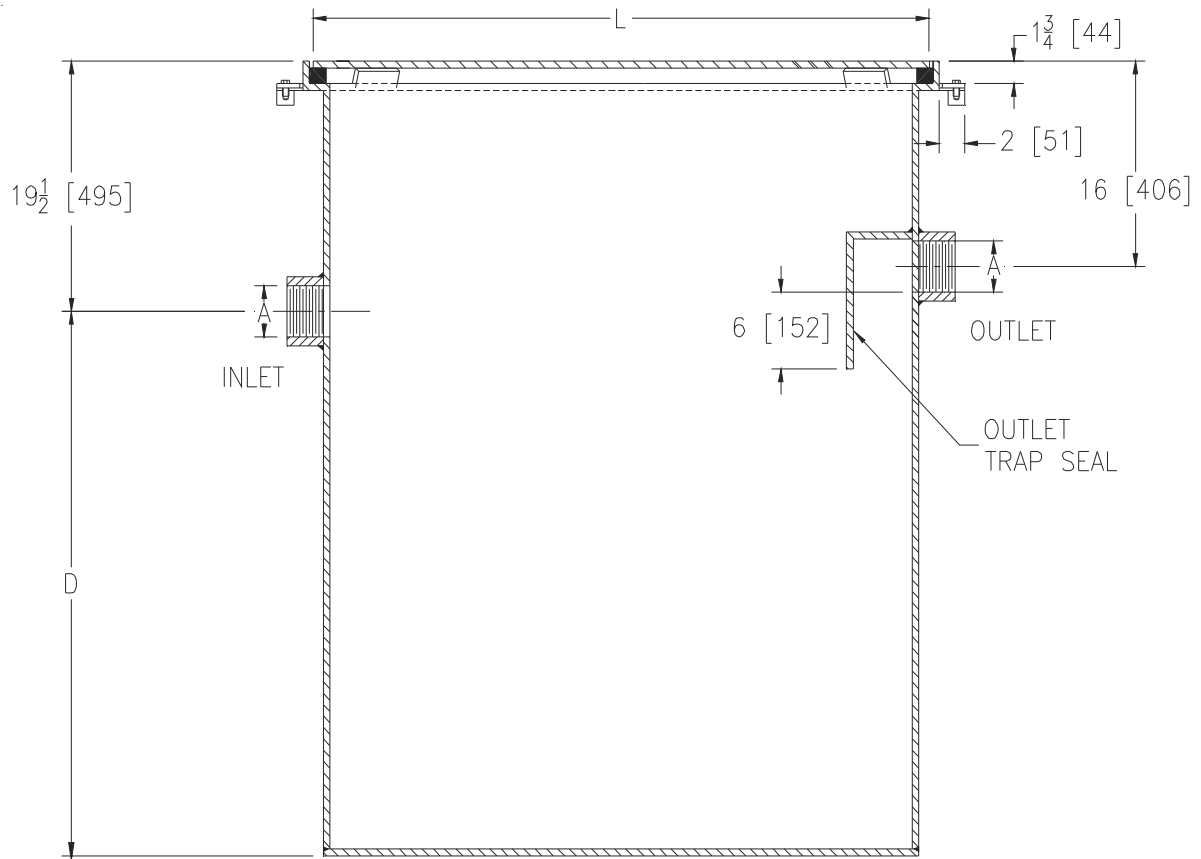

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	No. of 12 x 24 [305 x 610] Covers	Width	Approx. Wt. Lbs. [Kg]
150	150 [568]	4 [102]	48 [1219]	38 [965]	360 [1363]	8	48 [1219]	415 [188]

## ENGINEERING SPECIFICATION: ZURN Z1187-161

Fabricated Stainless Steel interior and exterior sand interceptor with integral extension, anchor flange and clamp collar, threaded inlet and outlet, complete with removable heavy-duty solid covers rated at 10,000 lbs [4536 kg] maximum safe live load. Stainless Steel conforms to ASTM specifications A351 grade CF8 (Type 304).

**OPTIONS** (Check/specify appropriate options)

### PREFIXES

\_\_\_ Z Type 304 Fabricated Stainless Steel\*

### SUFFIXES

\_\_\_ -NH No-Hub Inlet and Outlet (Specify Size)