




Z-1186-108 OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

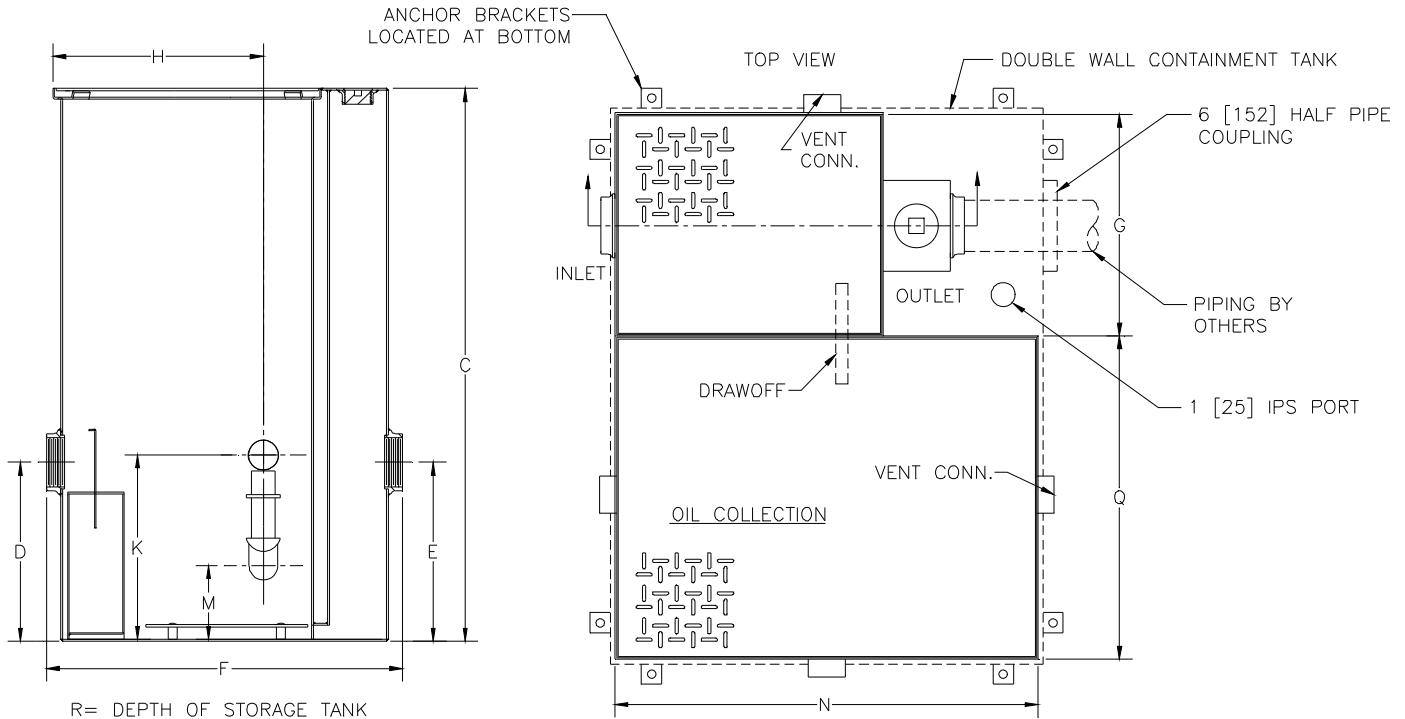

SIZE	Inlet/Outlet Size**	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	Oil Storage Tank Capacity Gal.[L]
800	3 [76]	50 [189]	30 [114]	171 [78]	30 [114]

Dimensions in inches										
SIZE	C	D/E	F	G	H	K	M	N	Q	R
800	56 1/4 [1429]	14 1/4 [362]	34 1/8 [867]	22 1/2 [572]	17 1/4 [438]	21 1/4 [540]	8 3/16 [208]	50 3/4 [1289]	17 1/2 [445]	56 1/4 [1429]

ENGINEERING SPECIFICATION: ZURN Z-1186-108 Acid Resistant Coated interior and exterior fabricated steel oil interceptor with built in extension, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting, extended integral storage tank and extended double wall containment tank with 1 [25] IPS level monitoring port and anchor brackets. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- **Z-** Acid Resistant Coated Fabricated Steel*
- ** Inlet and outlet size shown indicates standard operating size and flow control setting. Size #800 will have connections reduced to 3 [76] as standard. If changed, flow control and air relief by-pass must be adjusted accordingly.

REV.	DATE: 10/10/00	C.N. NO. 85911
DWG NO. P-14801	PRODUCT NO. Z-1186-108	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED