




Z1185-138

#3 LINT INTERCEPTOR W/4 [102] INLET & OUTLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

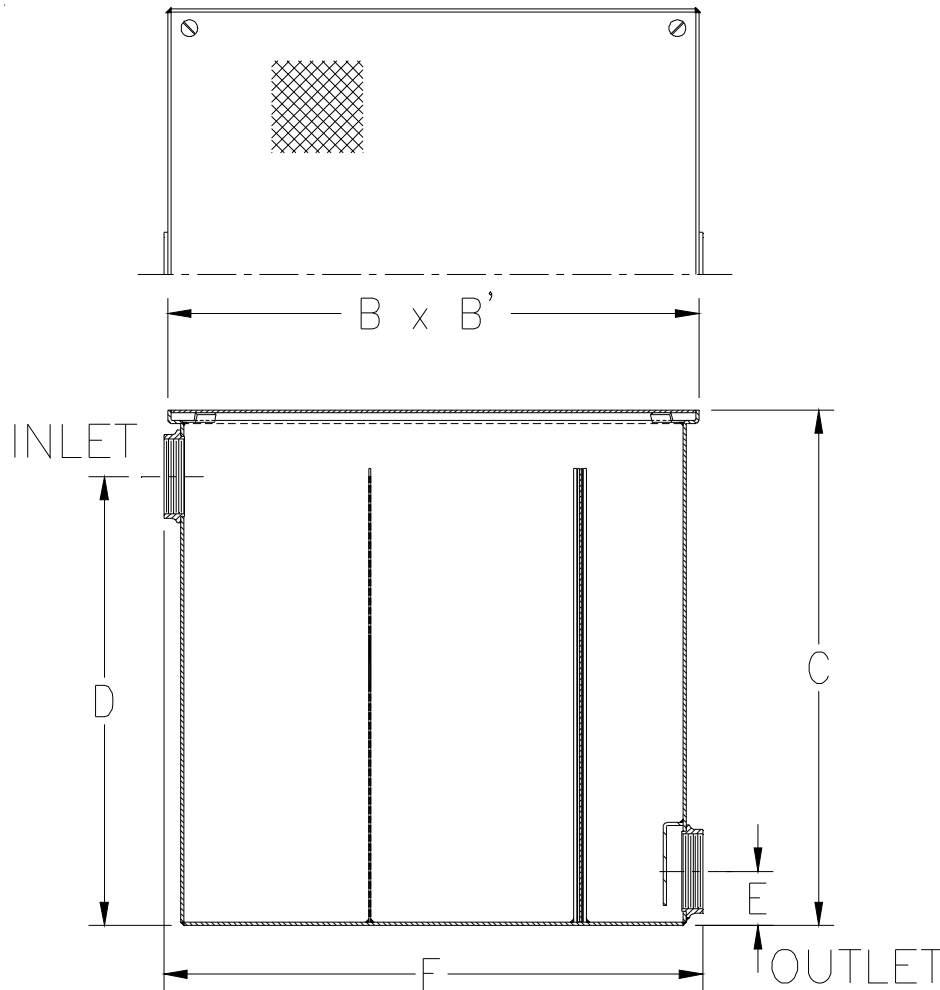

Size No. of Machines	Inlet/Outlet Size	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
3	4 [102]	30 [113]	93 [42]	17 [432]	17 [432]	16-1/2 [419]	12-1/2 [318]	4-1/4 [110]	17-1/4 [438]

ENGINEERING SPECIFICATION: ZURNZ1185-138

Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, aluminum lint intercepting secondary screen assembly, and permanent primary straining baffle with 3/8 [10] diameter perforated holes. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

- _____ Z Acid Resistant Coated Fabricated Steel*
- _____ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- _____ -E Acid Resistant Coated interior and exterior fabricated steel extension section (Specify 'C' dimension required for recessed installation).
- _____ -RS Aluminum Screen Replacement Assembly

* Regularly furnished unless otherwise specified.