




# Z415S-99

## BODY ASSEMBLY W/ "TYPE S" STRAINER, HEAVY DUTY GRATE, AND EXTENSION ADAPTER W/ HOLES

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

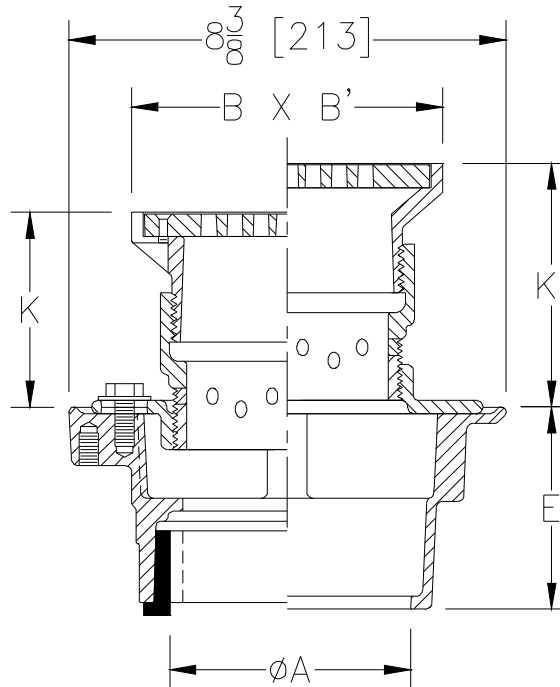

Dimensions In Inches						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm <sup>2</sup> ]
A - Pipe Size	B x B' Strainer Top Size	K		K'			
		Min.	Max.	Min.	Max.		
2-3-4 [51-76-102]	6 x 6 [152 x 152]	2 15/32 [63]	3 11/32 [85]	3 3/32 [79]	4 11/32 [110]	15 [8]	11 [71]

**ENGINEERING SPECIFICATION:** ZURN ZN415S-99 Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots, extension adapter with holes, and "TYPE S" polished nickel bronze square heavy-duty strainer.

**OPTIONS** (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET	'E' BODY HT. DIM.
2 thru 4 [51 thru 102]	_____ IC Inside Caulk	3 7/8 [98]
2 thru 4 [51 thru 102]	_____ IG Inside Gasket	3 7/8 [98]
2 [51]	_____ IP Threaded	2 3/8 [60]
3 [76]	_____ IP Threaded	2 5/8 [67]
4 [102]	_____ IP Threaded	2 7/8 [73]
2 thru 4 [51 thru 102]	_____ NH No-Hub	3 7/8 [98]
2 thru 4 [51 thru 102]	_____ NL Neo-Loc	3 3/4 [95]

**PREFIXES**

\_\_\_\_\_ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top\*

**SUFFIXES**

- \_\_\_\_\_ -AR Acid Resisting Epoxy Coated Cast Iron
- \_\_\_\_\_ -DP Decorative Polished Top
- \_\_\_\_\_ -G Galvanized Cast Iron
- \_\_\_\_\_ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
- \_\_\_\_\_ -SA Stabilizer Assembly
- \_\_\_\_\_ -SR Stabilizer Ring
- \_\_\_\_\_ -TC Neo-Loc Test Cap Gasket (2 [51] - 4 [102] NL Outlet Only)
- \_\_\_\_\_ -V Backwater Valve
- \_\_\_\_\_ -VP Vandal-Proof Secured Top

- \_\_\_\_\_ -Y Sediment Bucket
- \_\_\_\_\_ -18 Leveling Ring (See Z400-18)
- \_\_\_\_\_ -90 90° Threaded Side Outlet Body Assembly (2 [51] and 3 [76] Only)

<b>REV.</b>	<b>DATE: 01/19/12</b>	<b>C.N. NO. 122705</b>
<b>DWG. NO. 308754</b>		<b>PRODUCT NO. Z415S-99</b>

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED