




**Z-1186-114**  
**OIL INTERCEPTOR**  
**W/ INTEGRAL STORAGE TANK**

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

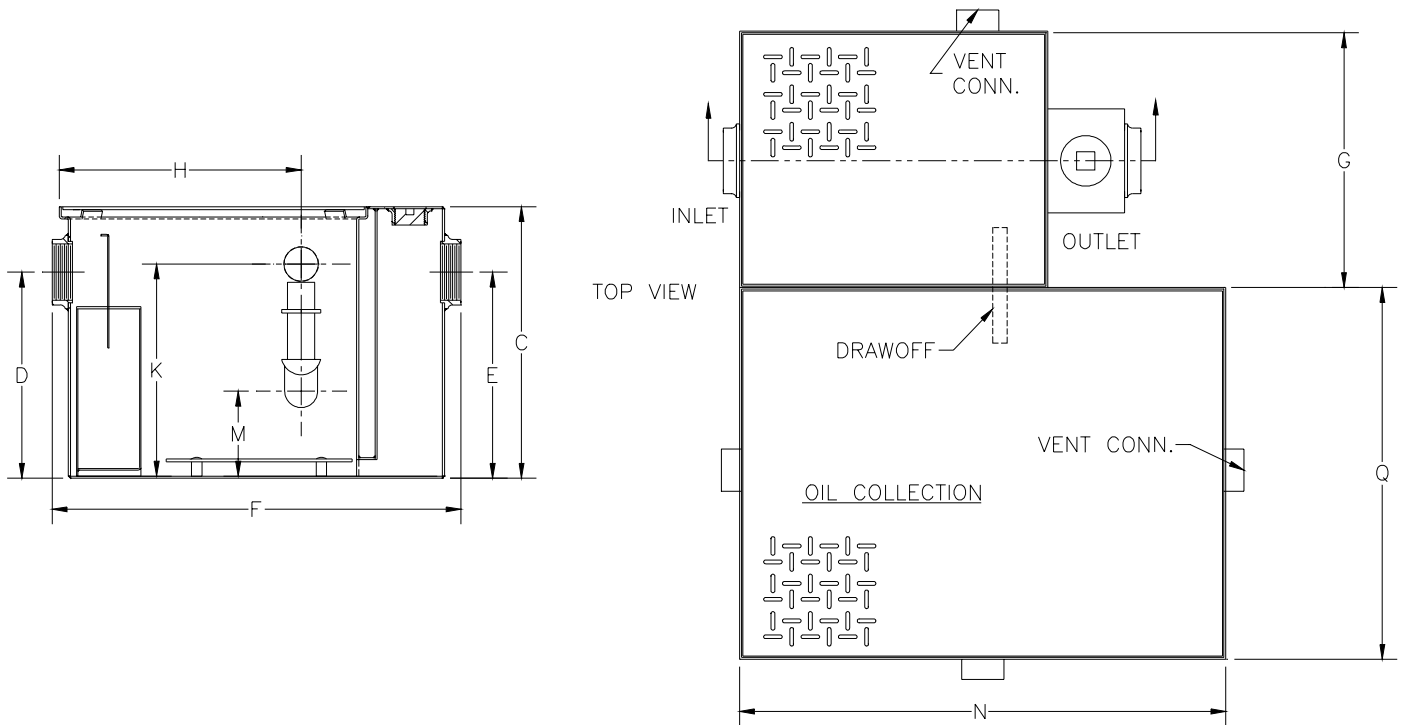

R= DEPTH OF STORAGE TANK

SIZE	Inlet/Outlet Size**	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	Oil Storage Tank Capacity Gal.[L]
300	2 [51]	10 [38]	7 [26]	182 [83]	20 [76]

Dimensions in inches										
SIZE	C	D/E	F	G	H	K	M	N	Q	R
300	25 1/8 [638]	8 1/8 [206]	22 5/8 [575]	14 [356]	11 5/8 [295]	10 5/8 [270]	4 5/16 [110]	30 [762]	21 [533]	30 [762]

**ENGINEERING SPECIFICATION:** ZURN Z-1186-114 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

— **Z-** Acid Resistant Coated Fabricated Steel\*

\*\* Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. Size #300 will have 3 [76] connections reduced to 2 [51] as standard. If changed, flow control and oil draw-off must be adjusted accordingly.

<b>REV.</b>	<b>DATE: 3/13/02</b>	<b>C.N. NO. 88383</b>
<b>DWG NO. P-14875</b>	<b>PRODUCT NO. Z-1186-114</b>	

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED