




Z625-114

ISOLATION DECK ADJUSTABLE DRAIN W/ UPPER Z415S, 5 [127] SQUARE STRAINER & Z415S LOWER BODY

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

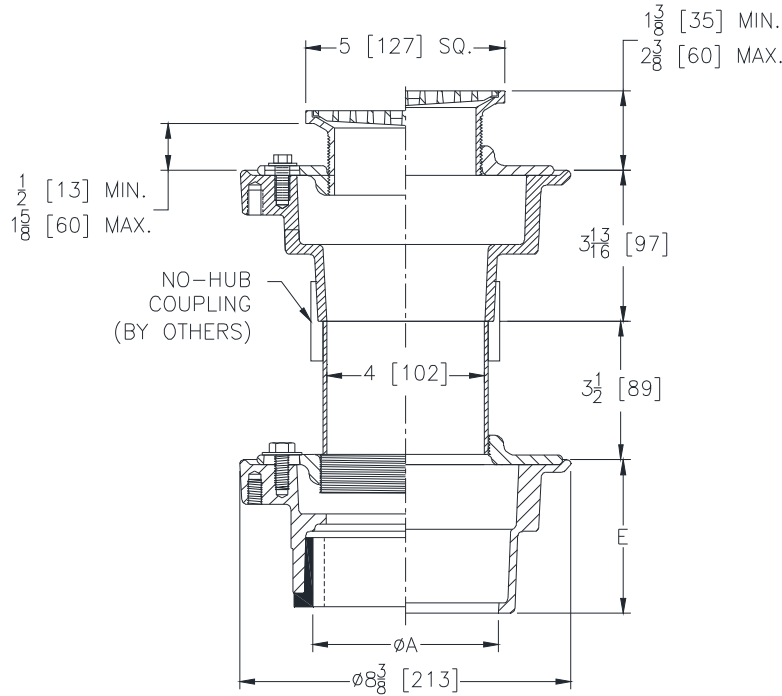

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2, 3, 4 [51, 76, 102]	42 [19]	9 [58]

ENGINEERING SPECIFICATION: ZURNZN625-114

Adjustable isolation deck drain, Dura-Coated cast iron upper and lower bodies, upper and threaded lower clamp collars, neoprene flex gasket, isolation nipple, adjustable 5" [127mm] square "TYPE S" polished nickel bronze strainer, Z1040 adaptor and Z415 lower body.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2,3,4 [51,76,102]
- 2 [51]
- 3 [76]
- 4 [102]
- 6 [152]
- 2,3,4 [51,76,102]
- 2,3,4 [51,76,102]

(Specify size/type) OUTLET

- ___ IC Inside Caulk
- ___ IP Threaded
- ___ IP Threaded
- ___ IP Threaded
- ___ IP Threaded
- ___ NH No-Hub
- ___ NL Neo-Loc

'E' BODY HT. DIM.

- 4-3/16 [106]
- 2-7/16 [62]
- 2-3/4 [70]
- 2-13/16 [71]
- 2-7/8 [73]
- 3-13/16 [97]
- 3-7/8 [98]

PREFIXES

- ___ ZB D.C.C.I Body w/Polished Bronze Top
- ___ ZN D.C.C.I Body w/Polished Nickel Bronze Top*

SUFFIXES

- ___ -C Underdeck Clamp (Lower Body)
- ___ -G Galvanized Cast Iron
- ___ -R Sump Receiver (Lower Body)
- ___ -U 3 [76] High Extension Adapter (Upper Body)
- ___ -VP Vandal-Proof Secured Top
- ___ -Y Sediment Bucket (Upper Body)

* Regularly furnished unless otherwise specified.